

INSTALLATION INSTRUCTIONS

CYL Series

Document:	LPN06504X0001A0_A	Date	07-01-2025
Created By:	TMT		

E-LITE

LED LIGHTING



3. Remove the conduits to access the Photocontrol or Directional/CCT adjustment switches. Adjust to the desired settings and replace the conduit plugs. See **Figure 3**.
4. Restore power and check that the fixture is working properly. If the fixture is not working, turn off the power and recheck all wiring connections. .

FIGURE 1

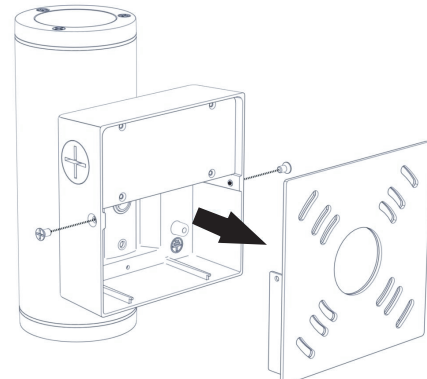


FIGURE 2


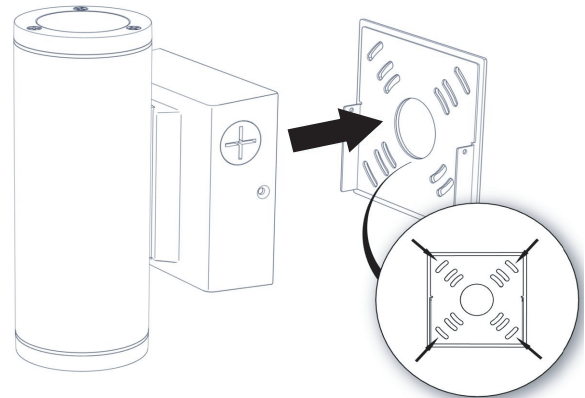


FIGURE 3

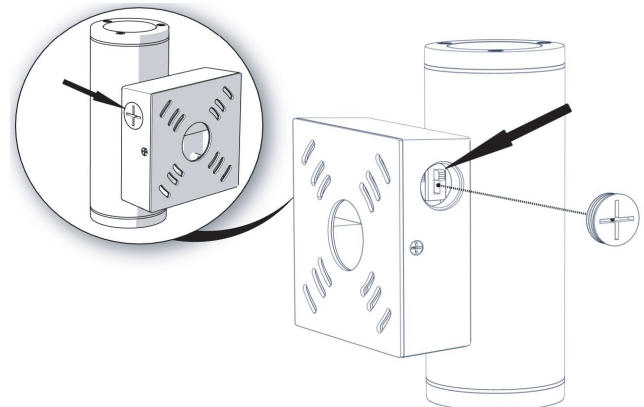

CAUTIONS

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. **DANGER**- Risk of shock- Disconnect power before installation. **DANGER** – *Risque de choc – Couper l'alimentation avant l'installation.*
2. This luminaire must be installed in accordance with the NEC or your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician. *Ce produit doit être installé conformément à NEC ou votre code électrique local. Si vous n'êtes pas familier avec ces codes et ces exigences, veuillez contacter un électricien qualifié.*
3. DO NOT make or alter any open holes in the luminaire. Do not modify the luminaire.
4. Use only UL (or other NRTL) approved wire for input/output connections.
5. Minimum size 18 AWG or 14 AWG for continuous runs.
6. Make sure LEDs and drivers are cool to touch when performing maintenance.
7. Make sure the supply voltage is the same as the rated voltage of the luminaire.
8. Do not install in a hazardous atmosphere, except where the ambient temperature does not exceed the rated operating temperature of the fixture.
9. Keep tightly closed when in operation.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

SCONE INSTALLATION

1. Remove the two (2) set screws. Put the screws in a secure place for later use. Separate the junction box bracket. See **Figure 1**.
2. Mount the junction box bracket (hardware provided by others). Wire the fixture per the **Electrical Connection** section. Reattach the fixture and secure with the two set screws removed in Step 1. See **Figure 2**.

INSTALLATION INSTRUCTIONS

CYL Series

Document:	LPN06504X0001A0_A	Date	07-01-2025
Created By:	TMT		

CEILING MOUNT INSTALLATION

1. Remove the set screws. Put the screws in a secure place for later use. Separate the junction box bracket by rotating it. See **Figure 4**.
2. To adjust the CCT, remove the upper canopy from the fixture by unscrewing it. Remove the conduit plug to access the CCT switch. Replace the conduit plug and canopy. See **Figure 5**.
3. Mount the junction box bracket to the ceiling (hardware provided by others). Wire the fixture per the **Electrical Connection** section. Reattach the fixture and secure with the two set screws removed in Step 1. See **Figure 6**.
4. Restore power and check that the fixture is working properly. If the fixture is not working, turn off the power and recheck all wiring connections.

PENDANT MOUNT INSTALLATION

1. Remove the set screws. Put the screws in a secure place for later use. Separate the junction box bracket by rotating it. See **Figure 4**.
2. Remove the canopy from the fixture by unscrewing it. Remove the conduit plug to access the CCT switch. Replace the conduit plug after making adjustments. See **Figure 5**.
3. Attach the female thread cover to the top of the fixture by passing the cable through it and screwing it onto the exposed thread. See **Figure 7**.
4. Pass the cable through the male cable cover and canopy. Attach the male cable cover to the bottom of the canopy by screwing it into the threaded hole of the canopy. See **Figure 8**.
5. Mount the junction box bracket to the ceiling (hardware provided by others). Wire the fixture per the **Electrical Connection** section. Attach the canopy and secure with the set screws removed in Step 1. See **Figure 9**.
6. Restore power and check that the fixture is working properly. If the fixture is not working, turn off the power and recheck all wiring connections.

DIRECT MOUNT INSTALLATION

1. Remove the set screws. Put the screws in a secure place for later use. Separate the mounting canopy from the fixture by rotating it.. See **Figure 10**.
2. To adjust the CCT, remove the mating bracket from the fixture by unscrewing it. Remove the conduit plug to access the CCT switch. Replace the conduit plug and mating bracket. See **Figure 11**.
3. Mount the canopy to the ceiling (hardware provided by others). Wire the fixture per the **Electrical Connection** section. Attach the fixture to the canopy and secure with the set screws removed in Step 1. See **Figure 12**.
4. Restore power and check that the fixture is working properly. If the fixture is not working, turn off the power and recheck all wiring connections.

FIGURE 4

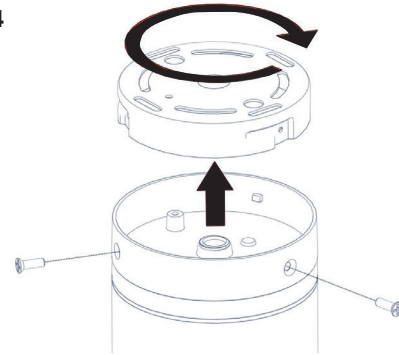


FIGURE 5

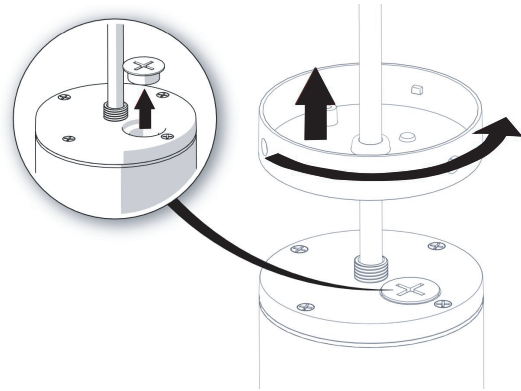


FIGURE 6

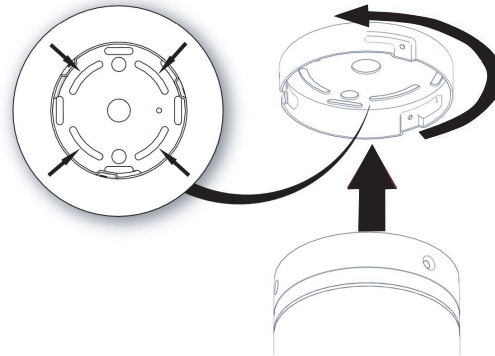


FIGURE 7

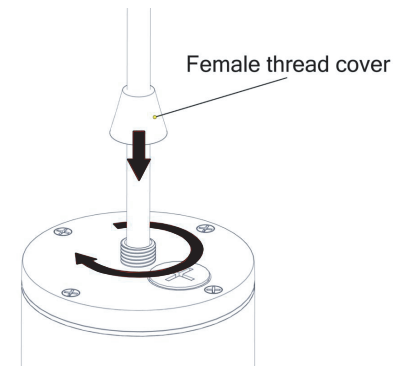


FIGURE 8

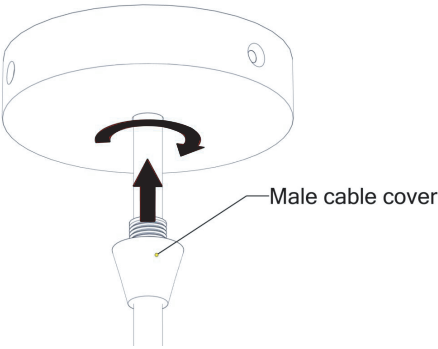


FIGURE 9

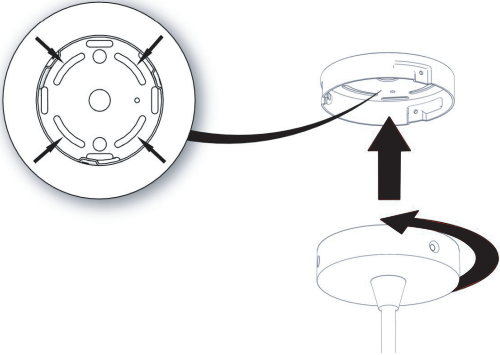


FIGURE 10

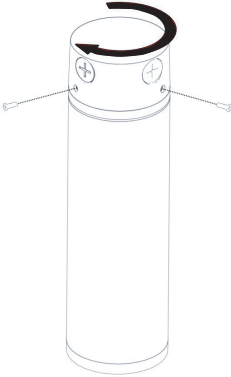


FIGURE 11


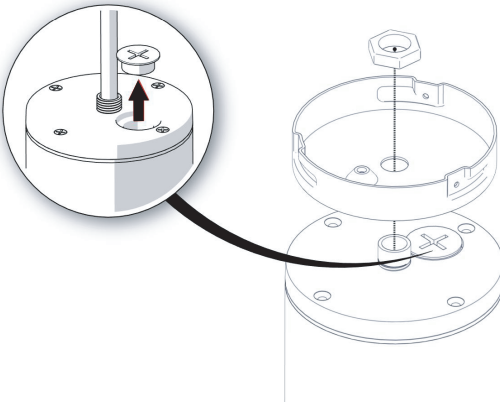


FIGURE 12



ELECTRICAL CONNECTIONS

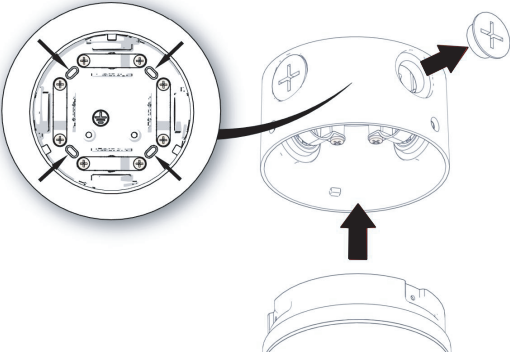