LED Center Basket Troffers

5 CCT and 5 Wattage Selectable

Project: _____ Location: _____

Date: _____ Part #: _____

Notes: _____





5CCT 30/35/40/50/65K

0-10V Dimming

DAMP LOCATION

Intertek

WARRANTY 5 YEARS

Performance & Features

LED Source

- Lumileds SMD2835 LEDs with 5-CCT White Color Selectable (3000K/3500K/4000K/5000K/6500K)
- CRI >80
- L70 lifespan of 100,000 hours
- 0-10V dimmable driver
- 120-277V input
- Flicker-free performance

Construction

- Highly durable die-cast aluminum housing
- Long-lasting white finish available
- Damp Location Rated
- 120° beam angle
- Frosted lens
- Operates efficiently in temperatures from -40°F to 140°F

Certifications and Warranty

- ETL Listed
- Backed by a 5-year limited warranty

SKU Guide

Example: TRO2-20T40-5CCT-DV2-WH

Family & Size	Wattage	CCT	Driver & Voltage		Finish	Options
TRO2 = 2x2 **TRO4** = 2x4	**20T40W** = 20/25/30/35/40W **20T50W** = 20/25/30/40/50W	**5CCT** = 3000K 3500K 4000K 5000K 6500K	**D** = 0-10V Dimming	**V2** = 120-277V	**WH** = White	**EM** = Battery Backup

MEDINAH POWER

LED Troffers


5 CCT and 5 Wattage Selectable

Specification

Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish
2x2 TRO2-20T40-5CCT-DV2-WH	20/25/30/35/40W	2500/3125/3750/4375/5000	5CCT 3000K/3500K/4000K/5000K/6500K	125	White
2x4 TRO4-20T50-5CCT-DV2-WH	20/25/30/40/50W	2500/3125/3750/5000/6200	5CCT 3000K/3500K/4000K/5000K/6500K	125	White

Contact for custom configuration & specifications

Accessories



Microwave Motion Sensor
TRO-MS




EM Battery Backup

Dimensions


TRO2-20T40-5CCT-DV2-WH





TRO4-30T50-5CCT-DV2-WH



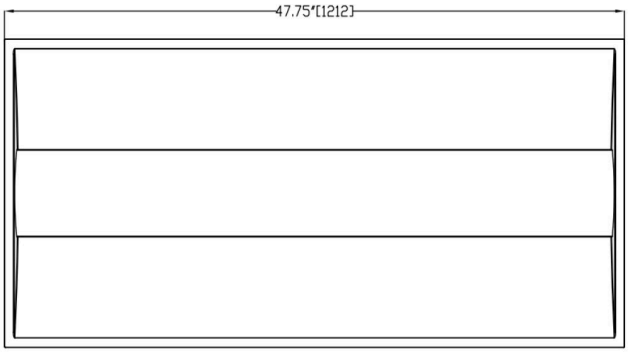



Packaging Dimensions

SKU#	Master Carton	Qty
TR02-20T40-5CCT-DV2-WH	25.5x25.7x5.5in	2
TR04-30T50-5CCT-DV2-WH	49.4x24.0x4.8in	2

Photometry

TR02-20T40-5CCT-DV2-WH

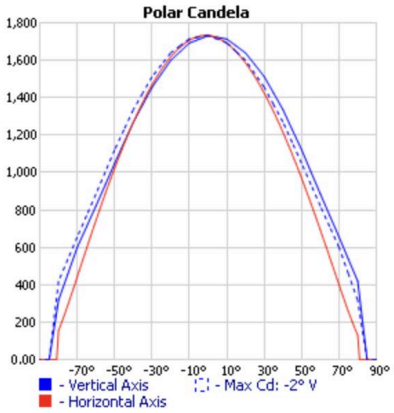


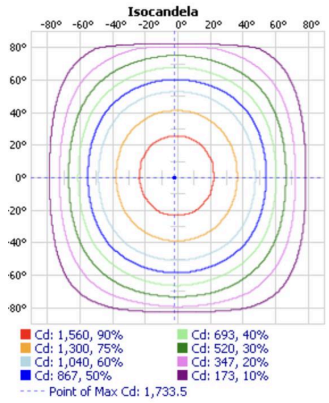


Zonal Lumens Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	1,341.1	26.6%	26.6%
0-40	2,198.2	43.6%	43.6%
0-60	3,906.0	77.4%	77.4%
60-90	1,139.0	22.6%	22.6%
70-100	495.4	9.8%	9.8%
90-120	0.000	0%	0%
0-90	5,045.1	100%	100%
90-180	0.000	0%	0%
0-180	5,045.1	100%	100%

TR04-30T50-5CCT-DV2-WH

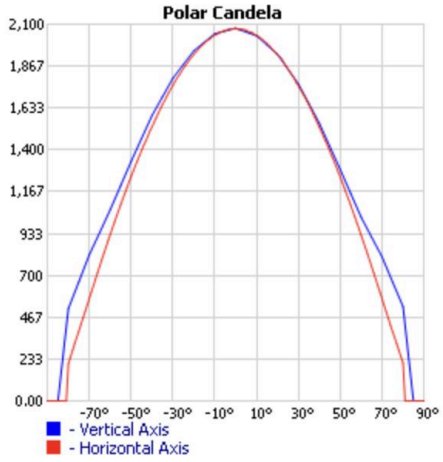

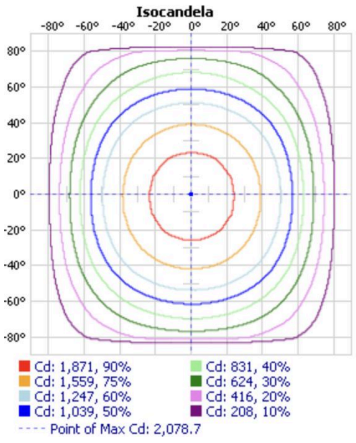

Zonal Lumens Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	1,614.1	25.6%	25.6%
0-40	2,654.6	42.1%	42.1%
0-60	4,761.9	75.5%	75.5%
60-90	1,544.8	24.5%	24.5%
70-100	717.4	11.4%	11.4%
90-120	0.000	0%	0%
0-90	6,306.7	100%	100%
90-180	0.000	0%	0%
0-180	6,306.7	100%	100%

Note: Additional Photometry available on request