

C-BD-A-PWY Series

LED Pathway Light with Photocell | Field Selectable CCT & Wattage

Replaces 100W PSMH



MEET YOUR NEW FAVORITE PATHWAY LIGHTING SOLUTION

Enjoy ultimate flexibility and lighting solutions with our aesthetically pleasing LED Pathway Light with photocell! Designed to meet the diverse needs of various applications, this cutting-edge lighting solution offers you a way to select your desired CCT and wattage at time of install. With just a few simple adjustments, you can customize the lighting output to suit your specific application needs.

- CCT and Wattage Selectability makes it perfect in any application
- Quick disconnect located on base for a quick and easy install
- Sleek, modern and aesthetically pleasing design
- Surpassed quality testing in house at Cree Lighting in Racine, Wisconsin
- Fogging or condensation issues are a thing of the past with this product
- UL Listed and backed by our 5-year limited warranty

Say goodbye to the limitations of fixed lighting configurations and embrace the freedom to create your desired lighting environment with this state-of-the-art LED Pathway Light.



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: Up to 3600 Lumens
- CRI: ≥ 80
- CCT Selectable: 3000K, 4000K or 5000K
- Wattage Selectable: 10W, 20W or 30W
- Dimmable: 0-10V dimming to 10%
- Estimated L70 Lifetime @ 25°C: > 100,000 hours
- Power Factor: ≥ 0.9 at full load
- Total Harmonic Distortion: < 20% at full load
- Limited Warranty: 5-year
- Replaces: 100W PSMH
- UL Listed

FEATURES	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> • Selectable CCT (color temperature): 3000K, 4000K or 5000K • Selectable Wattage: 10W, 20W or 30W • Quick disconnect located on base for easy install • Sleek and Modern design for a fair price • Tested in house at Cree Lighting in Racine, Wisconsin • No fogging or condensation issues 	<ul style="list-style-type: none"> • Auto Dealerships • Commercial • General Area Lighting • Offices • Outdoor Patios & Decks • Pathways and Walkways • Perimeter Lighting • Residential • Retail • Shopping Centers 	<ul style="list-style-type: none"> • Universal (120V - 277V)

ORDERING INFORMATION

Example SKU: C-BD-A-PWY-S3L-SCCT-UL-BZ

C-BD	A	PWY	S3L	SCCT	UL	BZ
PRODUCT	SERIES	STYLE	LUMEN PACKAGE	FIELD SELECTABLE CCT	VOLTAGE	HOUSING COLOR
C-BD	A	PWY Pathway	S3L Up to 3600 lumens (10W, 20W or 30W)	SCCT Selectable CCT (Color Temperature) 3000K 4000K* 5000K	UL Universal (120 - 277V)	BZ Bronze


* Default settings at time of shipping are highest product wattage and 4000K.

CERTIFICATIONS:

CA RESIDENTS WARNING: Cancer and Reproductive Harm –
www.p65warnings.ca.gov



C-BD-A-PWY Series

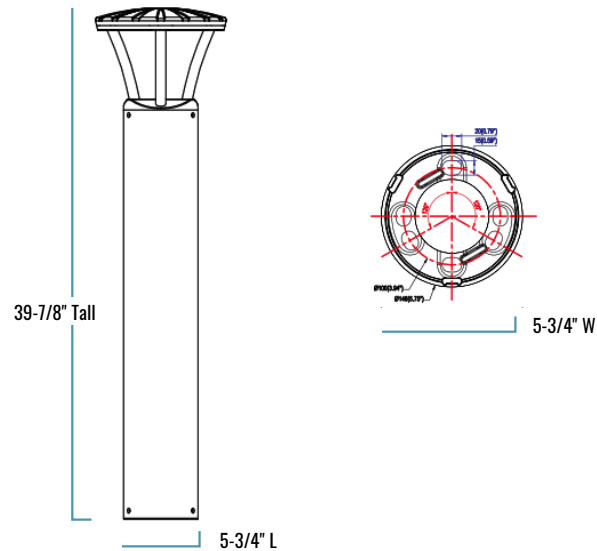

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
5-3/4" L x 5-3/4" W x 39-7/8" H	13.23 lbs.	0 to 10 feet	40-feet and can still achieve minimum security light levels

FIXTURE SPECIFICATIONS

HOUSING	Bronze extruded aluminum tube with die-cast aluminum light assembly
LENS MATERIAL	Clear UV-resistant polycarbonate
MOUNTING	Mounts via 3 bolt anchor system. Anchor bolts and template are included. Base includes quick connectors allowing the fixture to be removed and set off to the side preventing scratches or damage during install.

LUMINAIRE AND ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE	ESTIMATED L ₇₀ LIFETIME @ 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION
-40°F to 104°F (-40°C to 40°C)	>100,000 Hours	≥0.9 at full load	< 20% at full load

C-BD-A-PWY Series

C-BD-A-PWY SERIES	CCT	LUMEN	WATTS
	3000K	3513	30
	4000K	3600	
	5000K	3534	
	3000K	2567	20
	4000K	2656	
	5000K	2583	
	3000K	1308	10
	4000K	1353	
	5000K	1316	


WARRANTY AND CERTIFICATIONS

WARRANTY	cULus LISTED	DLC
5-Year Limited*	Wet Locations (Designed for outdoor use)	—

C-BD-A-PWY Series

ISO PLOT CHART

Mounting Height: 42"

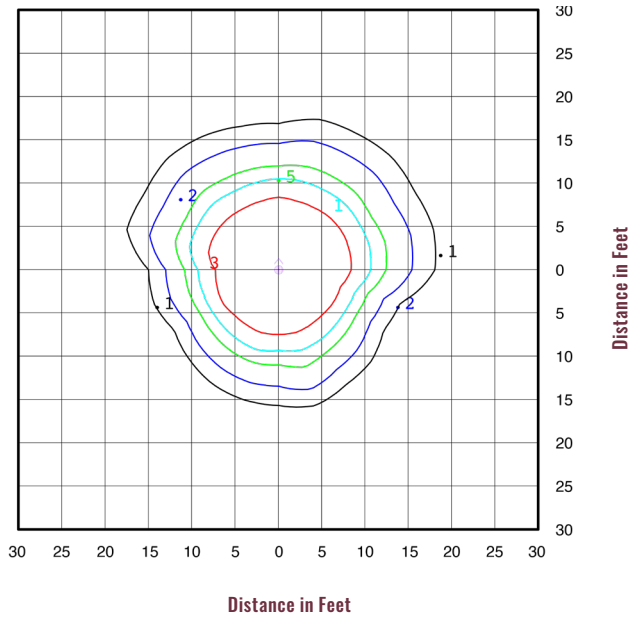

©2024 Cree Lighting USA LLC. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. Due to continuous product improvement, information in this document is subject to change. The cULus logo is a registered trademark of UL LLC.