


# C-EE-A-EX-ALM-DF Series

## LED Aluminum Exit Sign | Single/Double Face

### The Exit Sign That Won't Fail You

With a modern and professional appearance, our UL listed C-Lite LED Aluminum Exit Sign comes available in both red and green letters. Many models come equipped with a battery backup to ensure they won't fail you when you need them most. Enjoy a 5-year limited warranty.

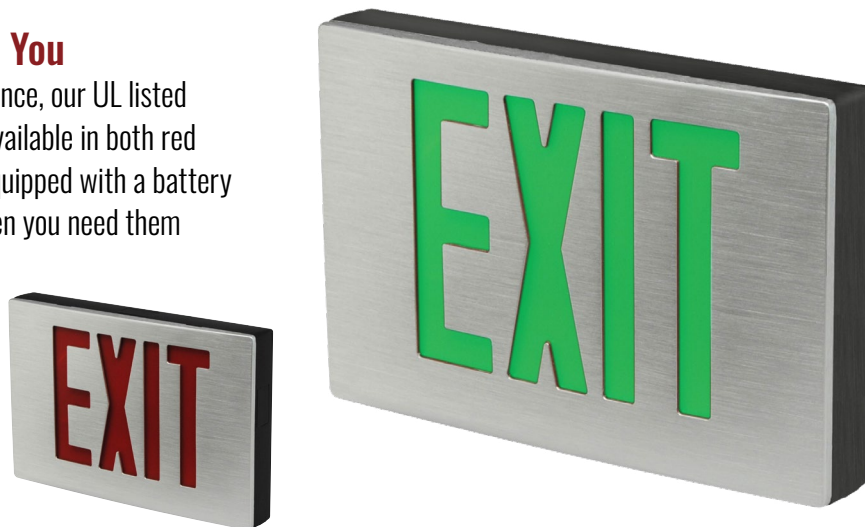

### PRODUCT SPECIFICATIONS

#### OVERVIEW

- Input Power: (Green Letters) 4.4W; (Red Letters) 3.6W
- Finish Color: Silver Faceplates with Black Frame
- Operating Temperature Range: 32°F to 122°F (0°C to 50°C)
- Limited Warranty: 5 Years\*
- Self-Test Diagnostics Option (Available)
- UL Listed
- 6" Letters: Red or Green
- Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

FEATURES	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> <li>• Aluminum Housing Material</li> <li>• 90-minute Battery Backup or AC Only Options</li> <li>• Sleek, modern style</li> <li>• Low energy, long-life ultra bright LED's</li> </ul>	<ul style="list-style-type: none"> <li>• Exit Identification</li> <li>• Indoor Commercial, Retail &amp; Industrial Applications</li> </ul>	<ul style="list-style-type: none"> <li>• 120V or 277V Operation</li> </ul>

### ORDERING INFORMATION


Example: C-EE-A-EX-ALM-DF-GRN-AC

C-EE	A	EX	ALM	DF			
PRODUCT	SERIES	IDENTIFICATION	HOUSING	FACE	LETTER COLOR	BATTERY BACKUP OPTION	SELF-TEST
C-EE	A	EX LED Exit Sign	ALM Aluminum Housing	DF Single/Double Face	GRN Green Letters RED Red Letters	BB Battery Backup AC AC Only	[BLANK] Manual-Test ST Self-Test

#### CERTIFICATIONS:



# C-EE-A-EX-ALM-DF Series

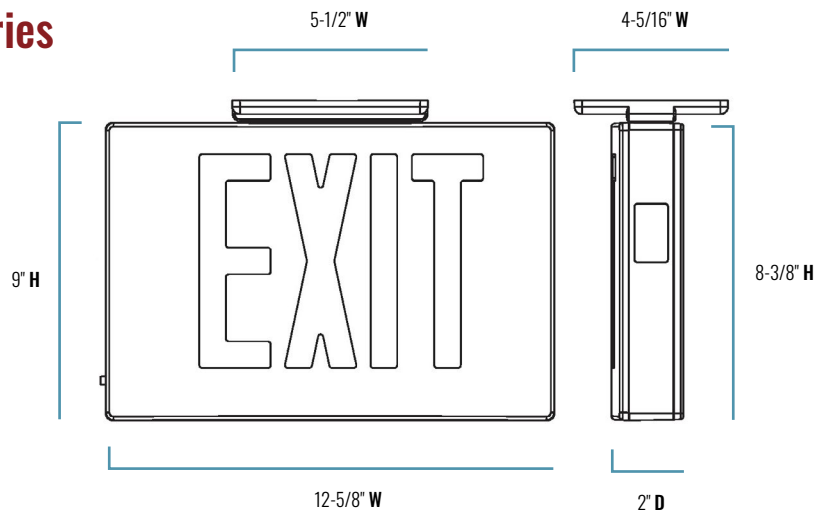

## SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT
12-5/8" W x 9" H x 2" D	6.2 lbs. (Without Battery Backup) 6.4 lbs. (With Battery Backup)

## FIXTURE SPECIFICATIONS

<b>HOUSING</b>	Premium-grade, die-cast aluminum face-plates with black powder-coated frame Field removable Chevron directional indicators
<b>MOUNTING</b>	Aluminum mounting canopy provided for top or end mount Universal knockout pattern on back plate for wall mount
<b>INCLUDES</b>	Mounting Hardware 4.8V maintenance-free, rechargeable nickel cadmium battery (BB models only) Charge/Power on LED Light indicator (Battery recharges within 24 hours via internal solid state, two rate charger) Push to test switch (non self-test models)

## ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE				
32°F to 122°F (0°C to 50°C)				
INPUT VOLTAGE	LETTER COLOR	SYSTEM WATTS	120V	277V
CURRENT DRAW (Amps):	Red Letters	4.4W	0.033A	0.017A
	Green Letters	3.6W	0.031A	0.019A

## WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED
5-Year Limited*	Damp Locations

**CA RESIDENTS WARNING:** Cancer and Reproductive Harm – [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

©2021 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent [www.creelighting.com/patents](http://www.creelighting.com/patents). C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The UL logo is a registered trademark of UL LLC.

US: [creelighting.com](http://creelighting.com), [e-conolight.com](http://e-conolight.com)

Distribution/Sales: 855-617-2733 Customer Service: 888-243-9445

Rev. Date: 02/15/2021

For informational purposes only. Content is subject to change. \*See [lighting.cree.com/warranty](http://lighting.cree.com/warranty) for details

**C-LITE**  
LED LIGHTING