

C-EE-B-EX-DF (Compact) Series

Compact LED Exit Sign with Battery Backup



THE EXIT SIGN YOU CAN DEPEND ON

Our C-Lite Compact LED Exit Sign comes ready for single/double face application, with your choice of red or green letters, white or black housing and manual or self-testing options. They've been rigorously tested to ensure they're fit for applications where it matters most. Mounting hardware is included and they're also UL Listed and carry a 5-year limited warranty.



PRODUCT SPECIFICATIONS

OVERVIEW

- Input Power: 1W
- Finish Color: White or Black
- Operating Temperature Range: 32°F to 122°F (0°C to 50°C)
- Battery Backup: Yes
- Limited Warranty: 5 Years*
- UL Listed for damp locations
- 6" Letters: Red and/or Green options
- Single/Double Face
- Certified to CEC under title 20 regulations
- Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

FEATURES	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> • Standard exit sign look that's compact • Self-Testing Diagnostics perform monthly, bi-annual and annual testing • Flexible mounting options • Removable chevron directional indicators 	<ul style="list-style-type: none"> • Exit identification • Indoor commercial, retail & industrial applications 	<ul style="list-style-type: none"> • 120V or 277V Operation

ORDERING INFORMATION


Example SKU: C-EE-B-EX-DF-RENGRN-BB-WH

C-EE	B	EX	DF		BB		
PRODUCT	SERIES	TYPE	FACE	LETTER COLOR	BATTERY BACKUP	TESTING OPTIONS	HOUSING
C-EE	B	EX LED Exit Sign	DF Single/ Double Face	GRN Green Letters RED Red Letters REDGRN Red and Green Letters (Not available with Self-Test Option)	BB Battery Backup	[Blank] Manual Test ST Self-Test Diagnostics (Not available with REDGRN Option)	WH White BK Black

CERTIFICATIONS:



C-EE-B-EX-DF Series

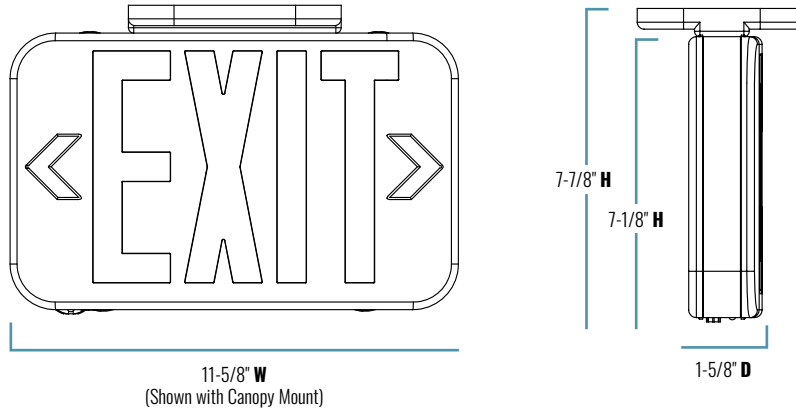

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT
11-5/8" W x 7-1/8" H x 1-5/8" D	2.2 lbs.

FIXTURE SPECIFICATIONS

HOUSING	White or black, injection-molded, 5VA flame retardant thermoplastic housing Easy to remove and replace chevrons
MOUNTING	Easy-snap mounting canopy included for top, end or side mounting Universal knockout pattern on back plate for wall mount Mounting hardware included
INCLUDES	Sealed 1.2V maintenance-free nickel cadmium battery backup (Minimum 90-minute emergency illumination) Charge/Power on indicator LED (battery recharges within 24 hours via internal solid-state, two-rate charger) Push-to-test switch (for manual-test option)

ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE
32°F to 122°F (0°C to 50°C)

WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED
5-Year Limited	Damp Locations

 **CA RESIDENTS WARNING:** Cancer and Reproductive Harm –
www.p65warnings.ca.gov

©2023 Cree Lighting USA LLC. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The UL logo is a registered trademark of UL LLC.

Rev. Date: 03/19/2024

For informational purposes only. Content is subject to change. *See e-conolight.com/warranties

C-LITE
LED LIGHTING