

C-SPC-A-WTD Series

LED Dock Light | With 42-inch Arm or Adjustable Magnet Mount

Replaces 250W Par 38



A HEAVY-DUTY DOCK LIGHT YOU CAN COUNT ON

This is the perfect addition to your workspace - our sleek and dependable LED Dock Light. It comes with either an adjustable 42-inch arm or adjustable magnet mount, delivers 3400 lumens and has a 5700K CCT. It features a 10-foot power cord and an extra outlet for a fan or anything else you need to plug in while you're on the job. Product won't get as hot as previous halogen technology when in use and includes a high-impact polycarbonate lens. It's backed by our standard 3-year warranty, ensuring you're covered when it comes to durability and dependability.



PRODUCT SPECIFICATIONS

OVERVIEW

- Max. Delivered Lumens: 3400
- CRI: ≥ 70
- CCT: 5700K
- Input Power: 30W
- Dimmable: No
- Operating Temperature Range: -40°F to 95°F (-40°C to 35°C)
- Estimated L₇₀ Lifetime @ 25°C (77°F): >50,000 hours
- Limited Warranty: 3-Year
- Replaces: 250W Par 38

FEATURES		RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none">• Product won't get as hot as previous halogen technology• Easy accessible ON/OFF switch• 42-inch adjustable arm• Tool-less knob for easy adjusting	<ul style="list-style-type: none">• 10ft power cord• Extra outlet for fan or other items• High impact polycarbonate lens• FCC Part 15, Subpart B, Class B limits for conducted and radiated emissions	<ul style="list-style-type: none">• Task & Workshop Lighting• Yard and Dock Illumination• Warehouse	<ul style="list-style-type: none">• 120V operation

ORDERING INFORMATION

Example SKU: C-SPC-A-WTD-42IN-3L-57K-120V-YLW


C-SPC	A	WTD		3L	57K	WH	YLW
PRODUCT	SERIES	STYLE		LUMEN PACKAGE	COLOR TEMPERATURE	VOLTAGE	COLOR
C-SPC Specialty	A	WTD Dock Light	42IN Adjustable 42in Arm MAG Adjustable Magnet Mount	3L 3400 Lumens (30W)	57K Cool White (5700K)	120V 120V Operation	YLW Yellow

CERTIFICATIONS:

CA RESIDENTS WARNING: Cancer and Reproductive Harm – www.p65warnings.ca.gov



C-SPC-A-WTD Series

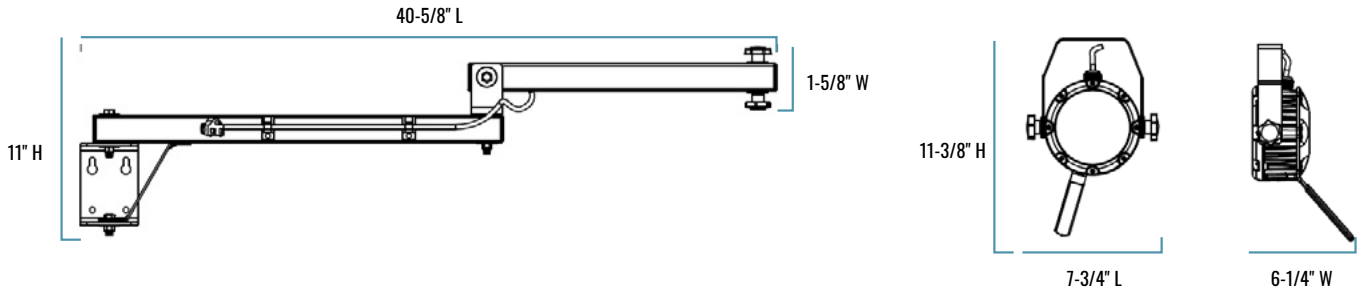

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
40-5/8" L x 1-5/8" W x 11" H (42IN)	11 lbs. w/ arm	0 to 10 feet	N/A
7-3/4" L x 6-1/4" W x 11-3/8" H (MAG)	3.66 lbs.		

FIXTURE SPECIFICATIONS

HOUSING	Yellow, heavy duty die-cast aluminum
LENS ASSEMBLY	High impact polycarbonate lens
MOUNTING	Mounting hardware included. 10-foot cord on both mounts. Comes with 42" adjustable arm and a NEMA 5-15P standard 3 prong plug. (42IN) Comes with adjustable heavy duty magnet for mounting to side of metallic surfaces and a NEMA 5-15P standard 3 prong plug. (MAG)

LUMINAIRE AND ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE	ESTIMATED L ₇₀ LIFETIME @ 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION
-40°F to 95°F (-40°C to 35°C)	>50,000 Hours	>0.9 at full load	<20% at full load

C-SPC-A-WTD Series

REPLACES	LUMEN OUTPUT	SYSTEM WATTS	CURRENT DRAW (AMPS)			
			120V	208V	240V	277V
250W Par 38	3400 Lumens	30W	0.234	N/A	N/A	N/A

WARRANTY AND CERTIFICATIONS

WARRANTY	cULus LISTED	DLC
3-Year-Limited	Damp Locations	—

© 2023 Cree Lighting USA LLC. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/ patents. C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The cULus logo is a registered trademark of UL LLC.