




LED CANOPY LIGHT  
**LED-3946N**  
**LED-3982N**

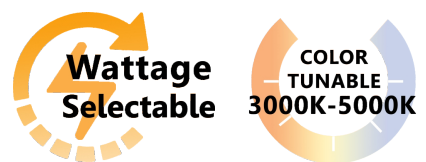

## PRODUCT DESCRIPTION

This canopy light has a slim and low profile design which provides a safe and visually appealing lighting experience. Luminaire can be mounted directly or with 3/4" pendant mounting option. Quick mount structure allows for contractors to work safely and easily in the confined space areas. With the FAO smart controller, this canopy allows multiple wattages and CCT to choose from for different environments. It is the perfect upgrade from a 100W metal halide lamp with the benefit of low maintenance cost.

photocontrol with on/off switch



Impact-resistant polycarbonate lens



Innovative quick mount system for easy mounting and installation

Solid constructed die-cast aluminum housing

FAO controller allows the end-user to choose from different CCTs and wattages



LED-3946N



LED-3982N



FEATURES

LISTING

UL and cUL listed for wet locations

HOUSING & LENS

Solid construction die-cast aluminum body  
Impact-resistant polycarbonate lens

FINISH

UV stabilized bronze power coated finish

MOUNT

Unique quick mount design for wiring box,  
pendant, or surface conduit installations



OPERATING INSTRUCTIONS

3 WATTAGE SELECTABLE


60/40/20 (LED-3946N) 105/95/80 (LED-3982N)

3 CCT SELECTABLE


5000K / 4000K / 3000K

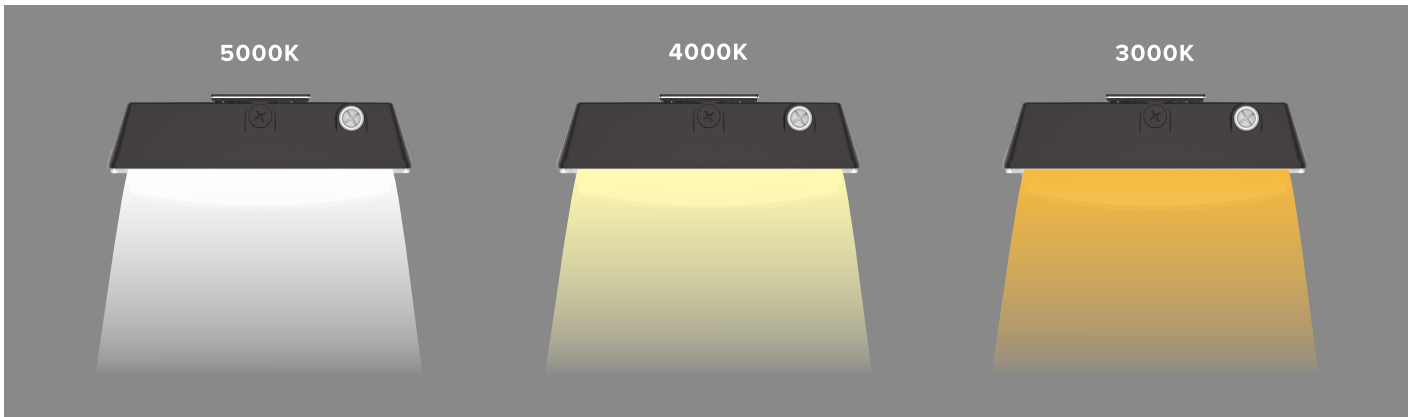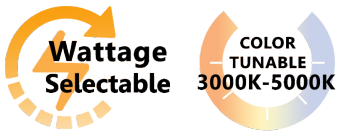

DIMENSION

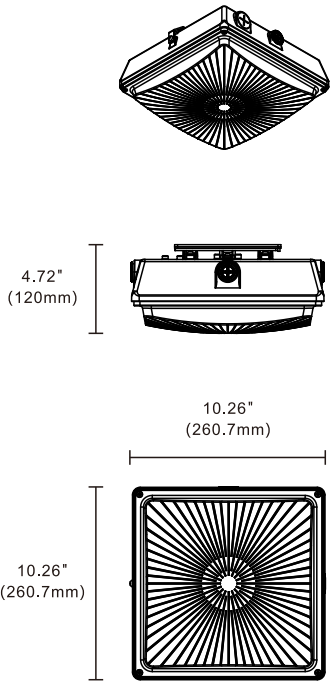

LED-3946N

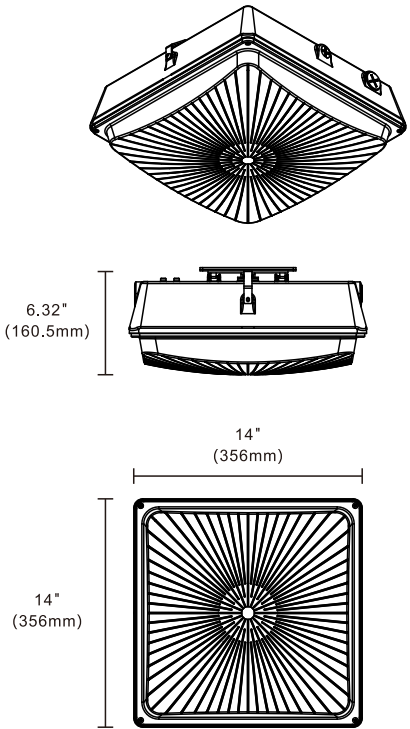

LED-3982N

PERFORMANCE DATA

| Model No.                                 | LED-3946N          | LED-3982N             |
|-------------------------------------------|--------------------|-----------------------|
| Nominal Wattage                           | 20/40/60W          | 80/95/105W            |
| Lumens*                                   | 2976/5755/8263 lm* | 10857/13281/16115 lm* |
| Efficacy*                                 | 151.12 lm/W*       | 158.47 lm/W*          |
| Default Setting: highest wattage at 4000K |                    |                       |

SPECIFICATION

| Model No.       | LED-3946N                | LED-3982N |
|-----------------|--------------------------|-----------|
| Nominal Wattage | 060=60W                  | 105=105W  |
| Input Voltage   | UNV=120-277VAC           |           |
| CRI             | 8=80+                    |           |
| Color Temp      | TX=3000K / 4000K / 5000K |           |
| Finish          | BN=Bronze                |           |
| Operating Temp  | -40°C - +40°C            |           |