




LED SURFACE MOUNT LIGHT
LED-4225
LED-6040

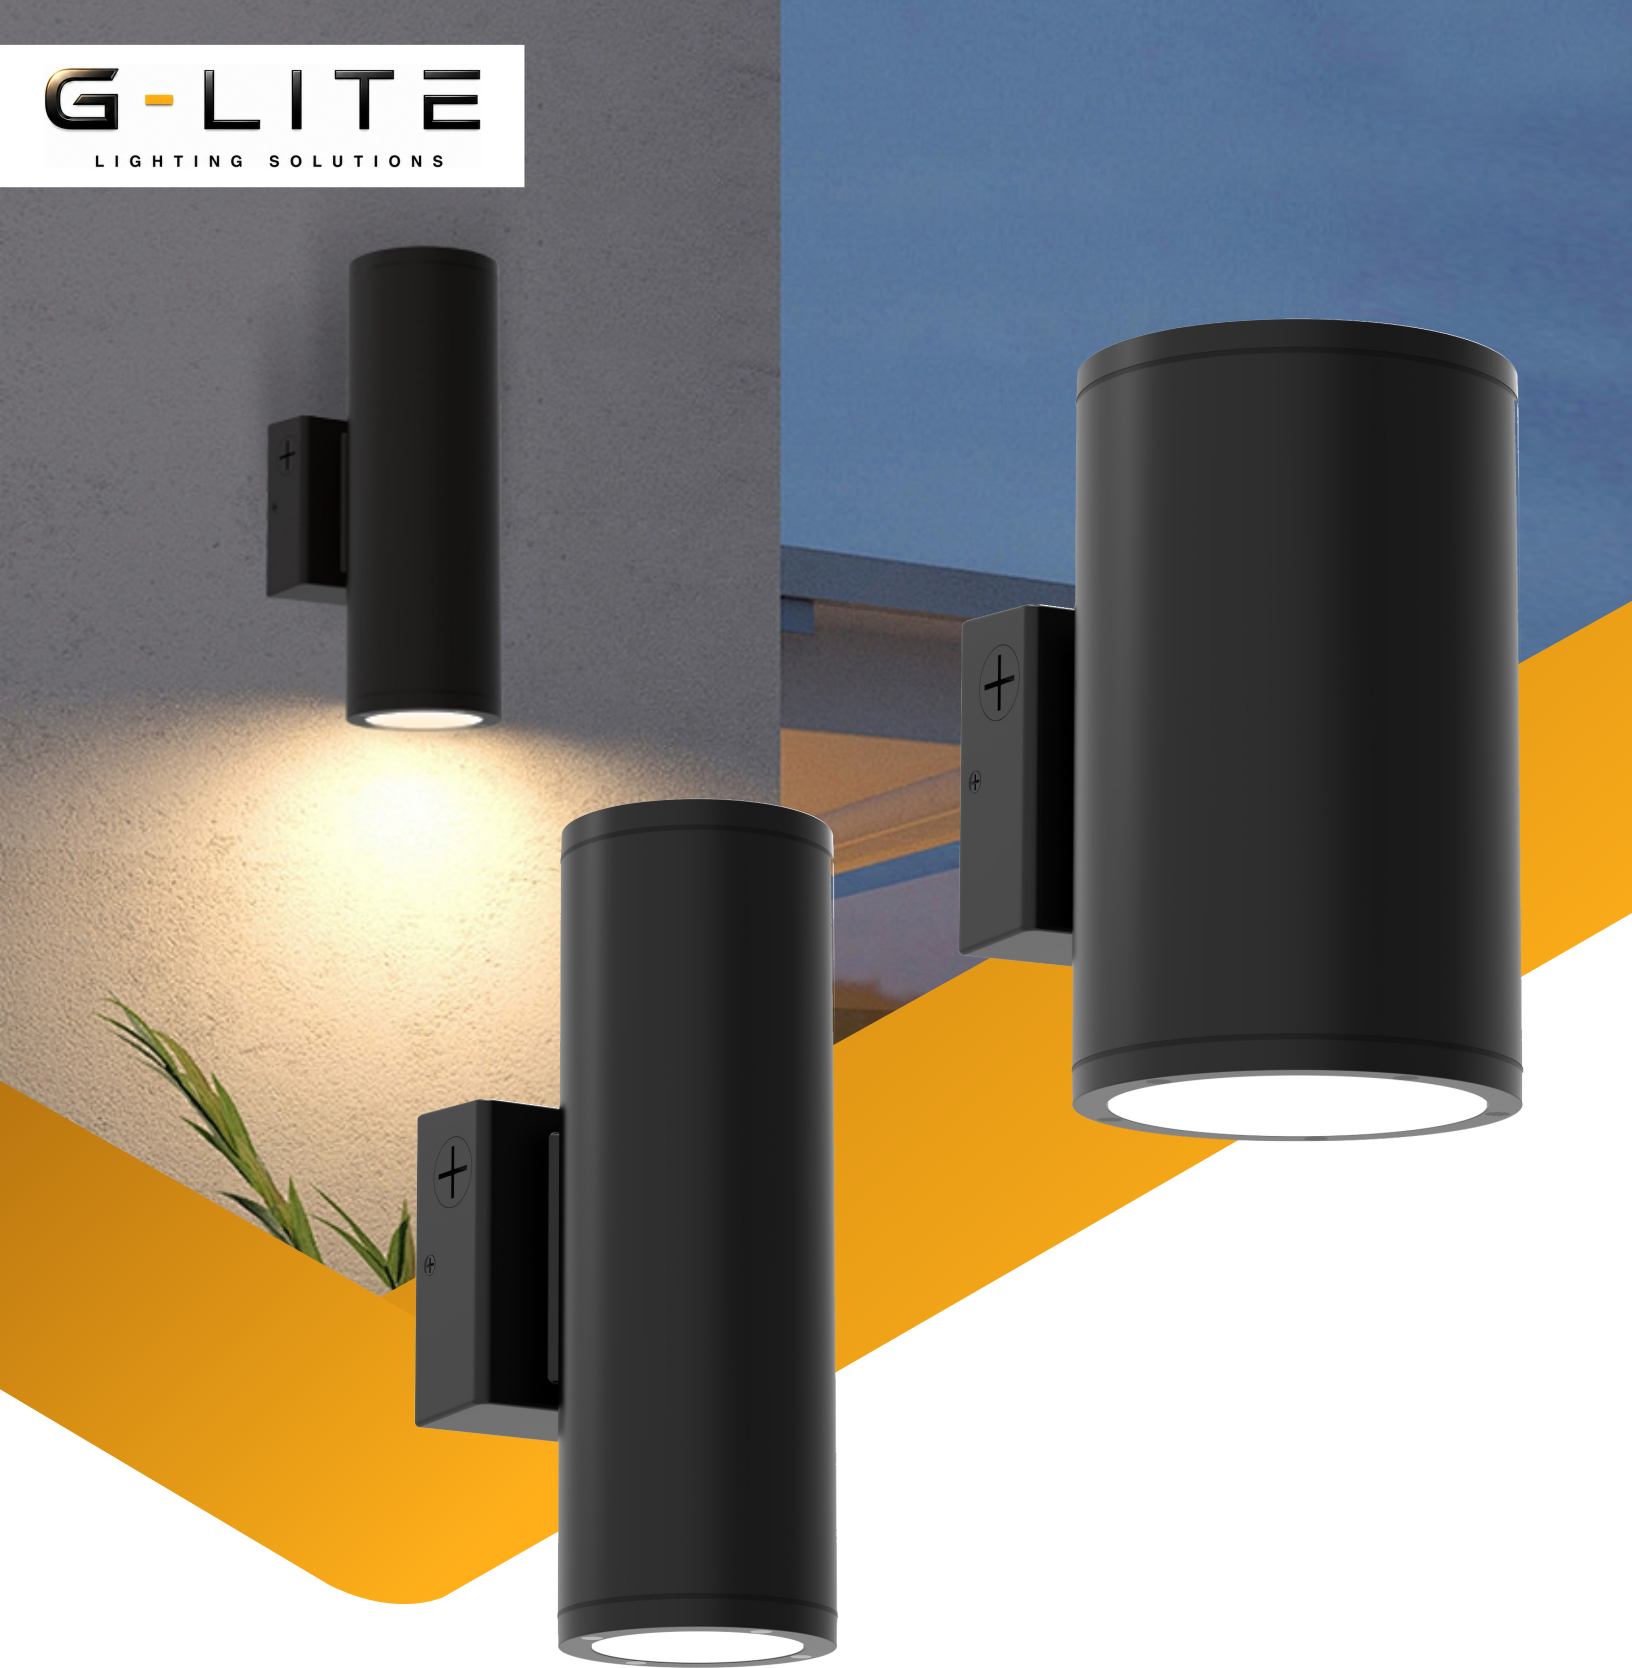

PRODUCT DESCRIPTION

FAO Controller
Convenient access to uplight and downlight switch, as well as the switch for CCT selection



Wall Mount Option
Different mounting option suitable for all environments


Quick Mount Plate
Included Quick Mount Plate for easy and contractor friendly installation




Photocontrol
Easy access to photocell switch



Downlight

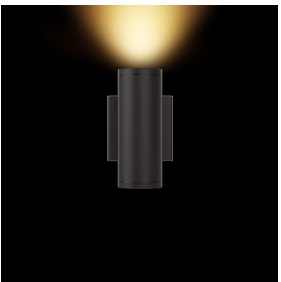

Uplight

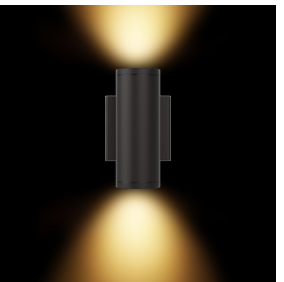

Up & Down



PRODUCT DESCRIPTION

This architectural cylinder series combines elegance with functionality, offering a versatile lighting solution with its wide range of settings. With various mounting options and multiple color temperature (CCT) choices, these fixtures provide exceptional flexibility to adapt to any environment. Equipped with high-performance LEDs and a durable, long-lasting driver, this series is built to meet the demands of many different applications, ensuring reliable performance and a tailored lighting experience for any space.

FEATURES

LISTING

UL and cUL listed

HOUSING

Aluminum extrusion body

FINISH

UV stabilized powder coated finish for outdoor

Available in Black



MOUNTING OPTION

Wall Mount



4"



6"

Cable Suspension Mount

Optional four 12"
connectable stems
(4ft total)
UNF 5/8" PIPES



4"



6"

Ceiling Mount



4"



6"

Direct Mount




4"



6"


INSTALLATION METHOD

Wall Mount

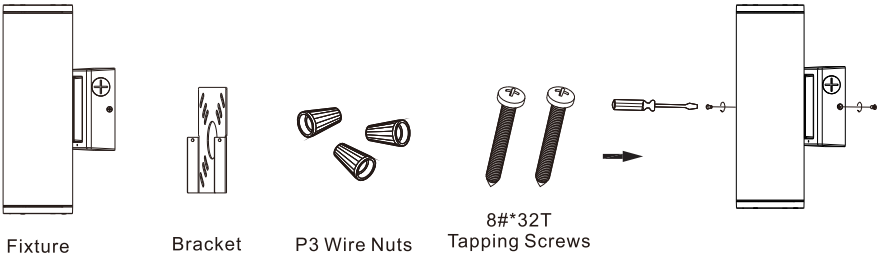


Cable Suspension Mount


Optional four 12" connectable stems (4ft total)

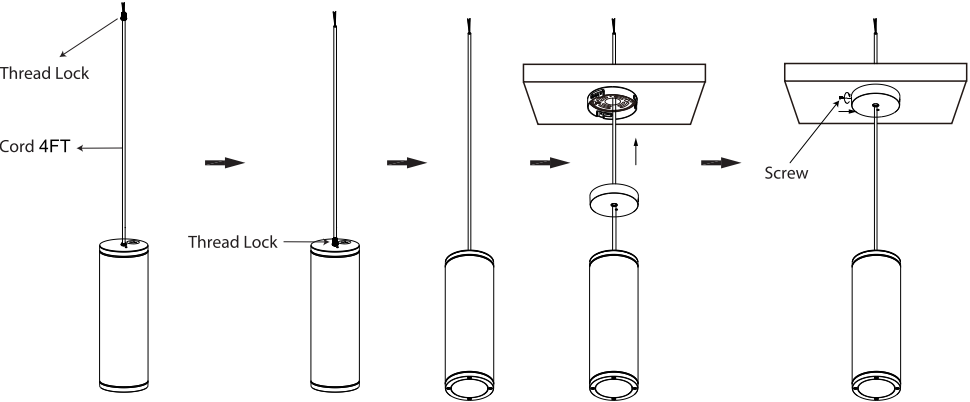

Ceiling Mount

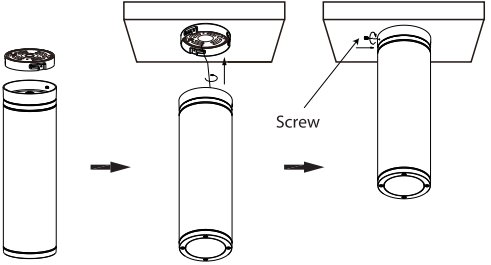

Direct Mount

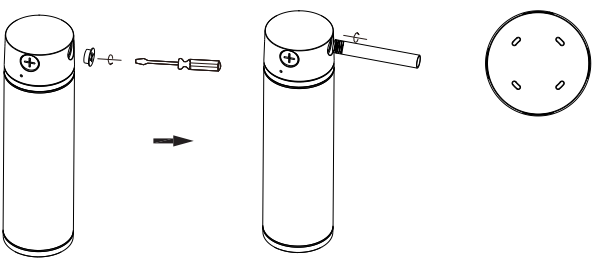




OPERATING INSTRUCTIONS

3 BEAM ANGLE SELECTABLE

Up / Full / Down

3 CCT SELECTABLE

3000K / 4000K / 5000K

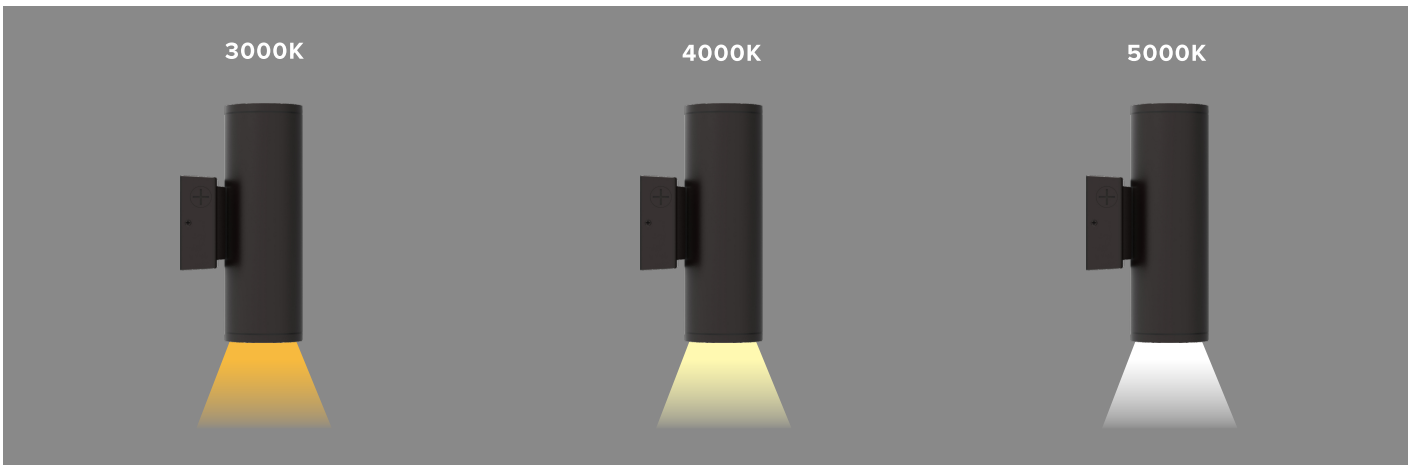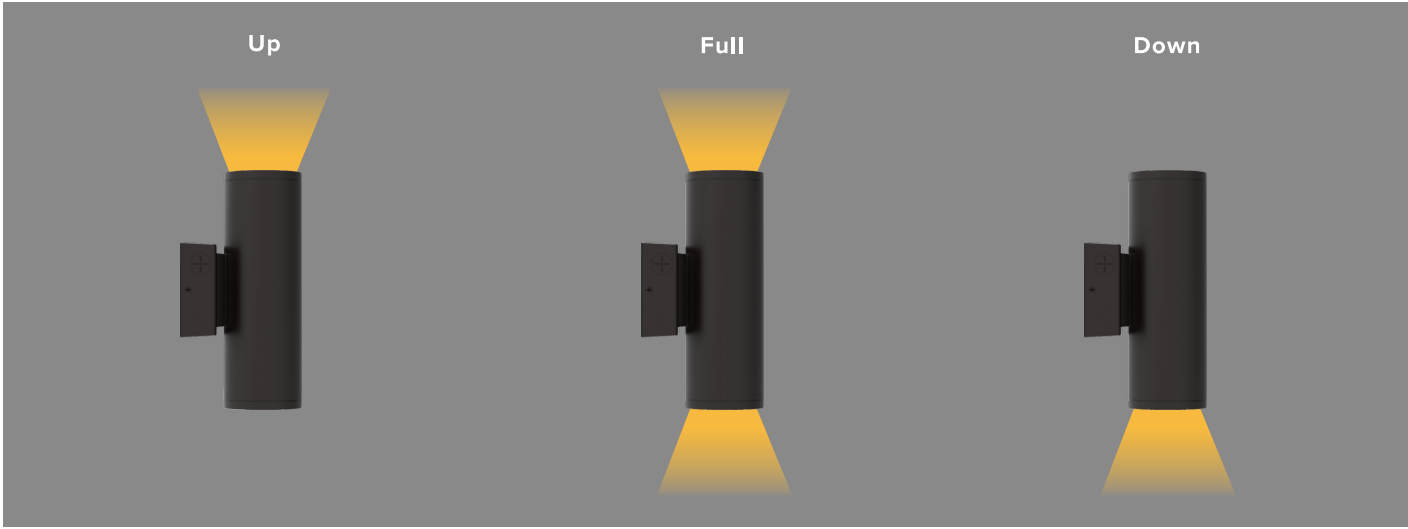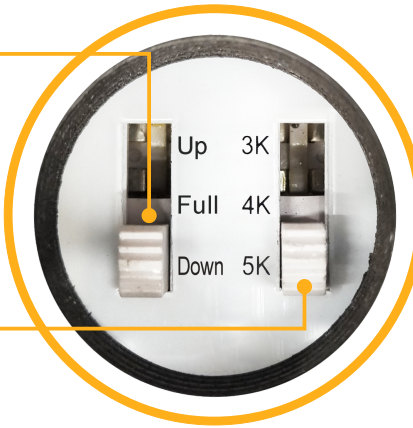

PERFORMANCE DATA

Model No.	Nominal Wattage	Lumens*	Efficacy**	Beam Angle
LED-4225W	20W	2542 lm**	130 lm/W**	75°
LED-6040W	33W	4571 lm**	147 lm/W**	
LED-4225C/P	20W	2485 lm**	120 lm/W**	
LED-6040C/P	33W	4825 lm**	140 lm/W**	
LED-4225D	20W	2485 lm**	120 lm/W**	
LED-6040D	33W	4825 lm**	140 lm/W**	
*Lumen Output and Efficacy are based on the highest wattage at 5000K 75° Beam Angle				



SPECIFICATION

Model No.	LED-4225W	LED-6040W	LED-4225C/P	LED-6040C/P	LED-4225D	LED-6040D
Nominal Wattage	020=20W	033=33W	020=20W	033=33W	020=20W	033=33W
Input Voltage	UNV=120-277VAC					
CRI	8=80+					
Color Temp	TX=3000K / 4000K / 5000K					
Beam Angle	75°					
Option	Four 12" (total 4ft) connectable stems and base for Pendant Mount (Purchased separately)					
Finish	BK=Black					
Operating Temp	-40°C - +40°C					


Note: Only Ceiling / Pendant Mount version is dimmable.

DIMENSION

WALL MOUNT

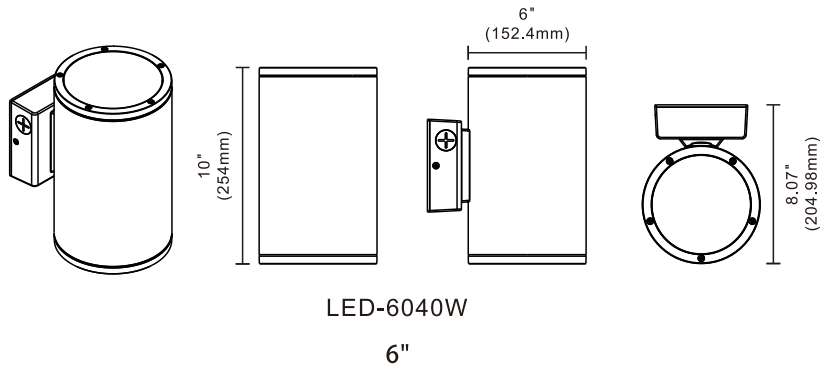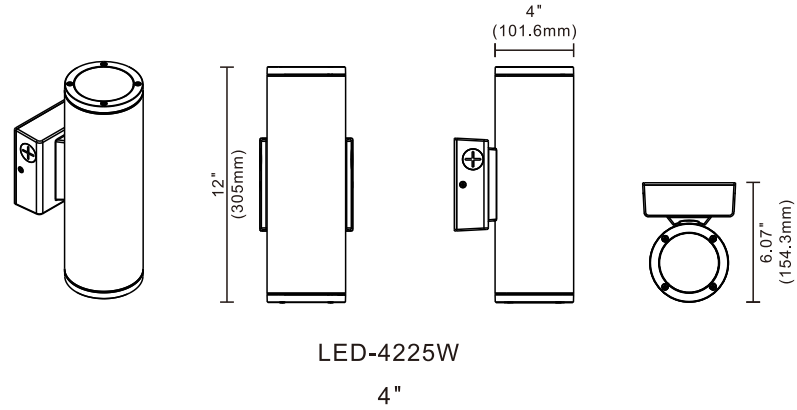


CABLE SUSPENSION MOUNT

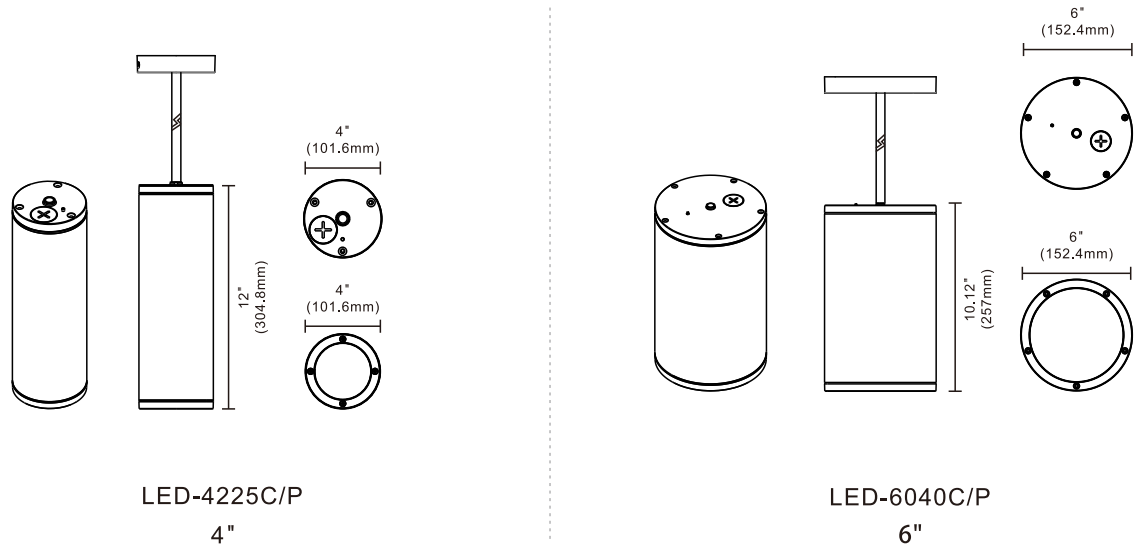

DIMENSION


CEILING MOUNT

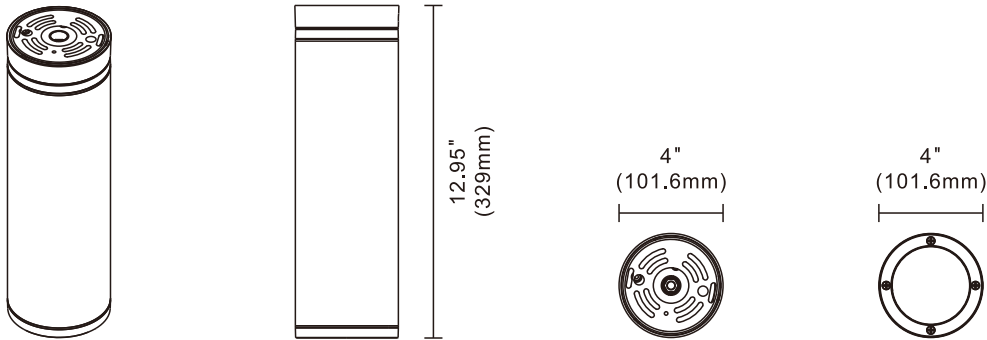


LED-4225C/P
4"

DIMENSION


DIRECT MOUNT

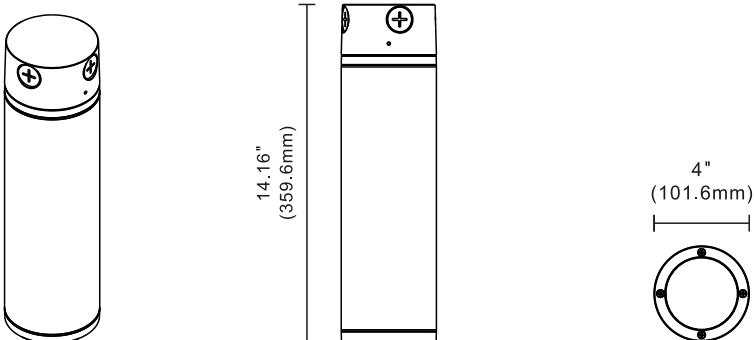

LED-4225D
4"

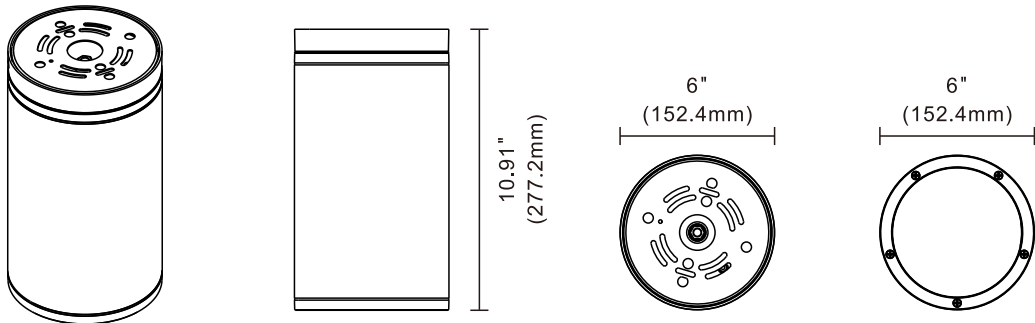

LED-6040C/P
6"

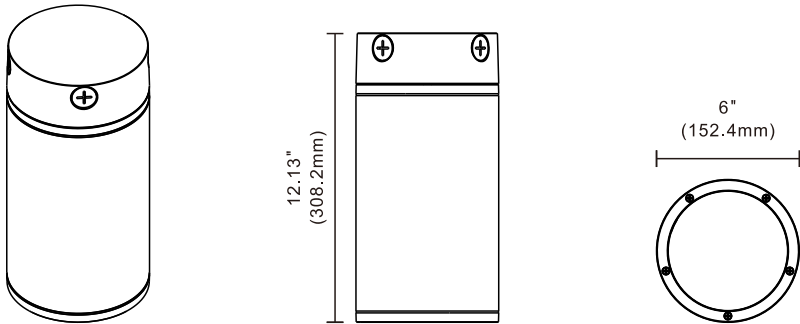

LED-6040D
6"