

POST TOP LIGHT LED-9500N



PRODUCT DESCRIPTION

This post top provides a subtle but stylish look for any job site. It is designed to save energy and reduce installation time. Photocontrol allows for additional energy savings. This post top is perfect for your architectural street lighting needs.



FEATURES

LISTING

UL and cUL listed for WET LOCATIONS

HOUSING

Corrosion resistant heavy duty-cast aluminum construction. Standard 3" open on the bottom
Wiring Compartment on the Top for easy access and ease of installation

FINISH

Superior powder coat finish to withstand the toughest weather
Standard bronze with color options




OPERATING INSTRUCTIONS

3 WATTAGE SELECTABLE


60 / 40 / 20W

3 CCT SELECTABLE




5000K / 4000K / 3000K



TYPE V OPTICAL DISTRIBUTION

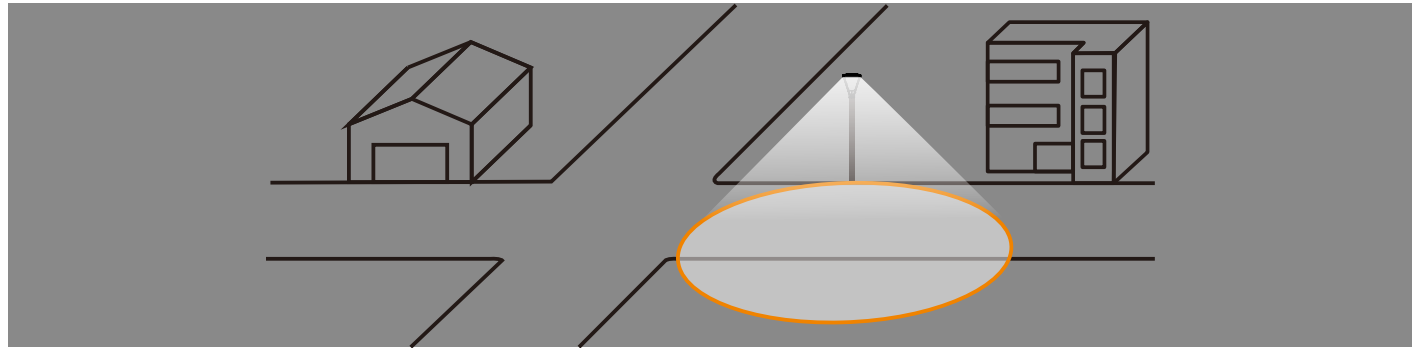

DIMENSION

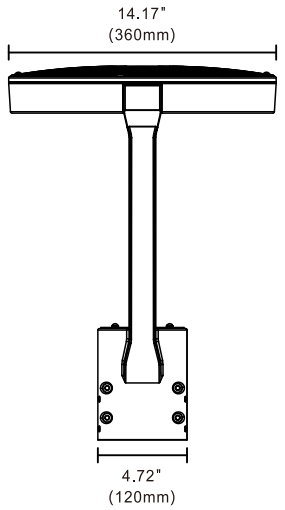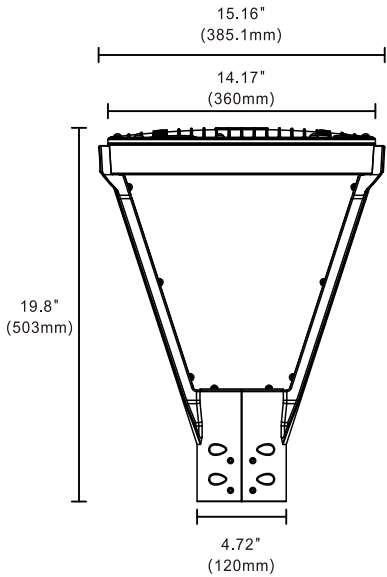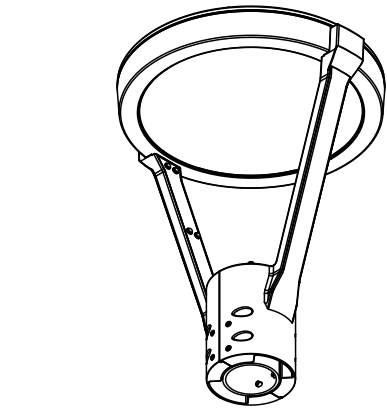

PERFORMANCE DATA

Model No.	LED-9500N
Nominal Wattage	20/40/60W
Lumens*	2915/5846/8388 lm*
Efficacy*	142.3 lm/W*
*Lumen Output and Efficacy are based on the highest wattage at 5000K	

SPECIFICATION

Model No.	LED-9500N
Nominal Wattage	060=60W
Input Voltage	UNV=120-277VAC
CRI	8=80+
Color Temp	TX=3000K / 4000K / 5000K
Distribution	TYPE V
Finish	BN=Bronze
OperatingTemp	-40°C - +40°C