





LED Traditional Wall Pack

3 CCT and 3 Wattage Selectable

Project: _____ Location: _____

Date: _____ Part #: _____

Notes: _____



Performance & Features

LED Source

- Lumileds SMD2835 LEDs with 3-CCT White Color Selectable (3000K/4000K/5000K)
- CRI >80
- L70 lifespan of 100,000 hours at 25°C
- 0-10V dimmable driver
- 120-277V input
- Built-in 6kV surge protection
- Flicker-free performance

Construction

- Highly durable die-cast aluminum housing
- Long-lasting dark bronze and white finishes available
- Wet Location Rated
- H95° beam angle
- Prismatic Clear glass lens
- Operates efficiently in temperatures from -40°F to 122°F

Certifications and Warranty

- UL Listed
- DLC 5.1 Premium
- Meets FCC Part 15, Subpart B, Class B limits
- Backed by a 5-year limited warranty

SKU Guide

Example: WPLL-40T80W-3CCT-DV2-PC-CL-BZ

Family	Wattage	CCT	Driver & Voltage		Controls	Lens Type	Finish
WPLL	40T80W 80T120W	3CCT = 3000K 4000K 5000K	D = 0-10V Dimming	V2 = 120-277V	PC = Photocell	CL = Clear	BZ = Dark Bronze WH = White

Note: Luminaire ships from factory at full power and 5000K CCT. Wattage and CCT may be adjusted through switches in the field.


Specification

Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish				
40W-60W-80W - Selectable									
WPLL-40T80W-3CCT-DV2-PC-CL-BZ WPLL-40T80W-3CCT-DV2-PC-CL-WH	40W/60W/80W	6,000 9,000 12,000	3CCT 3000K/4000K/5000K	150	Bronze or White				
80W-100W-120W - Selectable									
WPLL-80T120W-3CCT-DV2-PC-CL-BZ WPLL-80T120W-3CCT-DV2-PC-CL-WH	80W/100W/120W	12,000 15,000 18,000	3CCT 3000K/4000K/5000K	150	Bronze or White				

Contact for custom configuration & specifications

Dimensions

Weight: 7.5 lbs


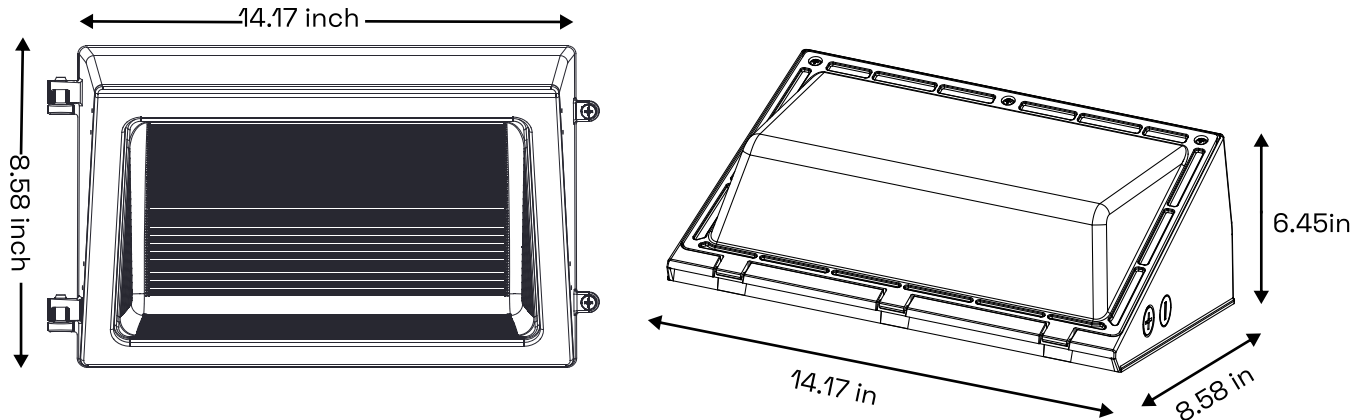


Packaging Dimensions

SKU#	Master Carton	Qty	Weight
WPLL-40T80W-3CCT-DV2-PC-CL-BZ WPLL-40T80W-3CCT-DV2-PC-CL-WH	16.14x11.41x9.44in	1	9.93 lbs
WPLL-80T120W-3CCT-DV2-PC-CL-BZ WPLL-80T120W-3CCT-DV2-PC-CL-WH	16.14x11.41x9.44in	1	9.93 lbs

Photometry

WPLL-40T80W-3CCT-DV2-PC-CL-BZ
WPLL-40T80W-3CCT-DV2-PC-CL-WH

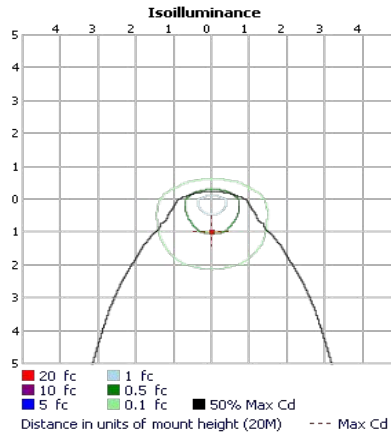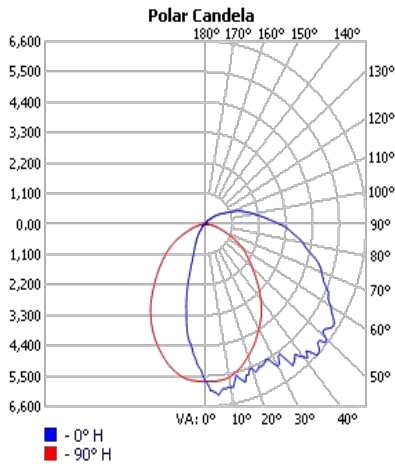

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	3,697.3	21.9%	21.9%
0-40	5,774.9	34.3%	34.3%
0-60	10,203.6	60.5%	60.5%
60-90	4,745.2	28.1%	28.1%
70-100	3,560.8	21.1%	21.1%
90-120	1,620.8	9.6%	9.6%
0-90	14,948.8	88.7%	88.7%
90-180	1,909.8	11.3%	11.3%
0-180	16,858.6	100%	100%

BUG Rating

B3 - U5 - G5

Forward Light	Lumens	Lumens %
Low(0-30):	2,331.5	13.8%
Medium(30-60):	5,401.9	32%
High(60-80):	3,349.9	19.9%
Very High(80-90):	1,144.9	6.8%
Back Light		
Low(0-30):	1,366.2	8.1%
Medium(30-60):	1,105.7	6.6%
High(60-80):	219.8	1.3%
Very High(80-90):	29.9	0.2%
Uplight		
Low(90-100):	792.7	4.7%
High(100-180):	1,116.8	6.6%
Trapped Light:	0.0	0%

Note: Additional Photometry available on request