


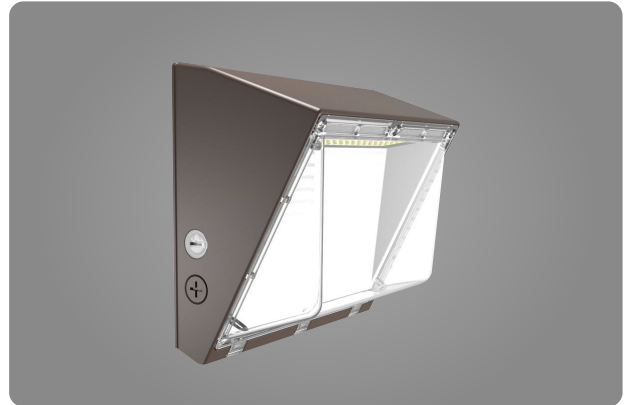

PERFORMANCE FEATURES

UL Listing

Suitable for wet locations

LEDs:

Lumileds 2835, high CRI.

Housing

Diecast Aluminum housing

Diffuser

Polycarbonate

Controls

- Photocell

Finish

Long lasting dark bronze finish with high durability

Ambient Operating Temp.

-40°C (-40°F) to 45°C (113°F)

Dimming Driver:

Dimming: 0-10V dimming to 10%, Dims to Off standard

Flicker Percent

<30%

Application

Entrance lighting, Perimeter lighting, courtyard lighting, Industrial lighting, Outdoor landscape lighting.

IESNA LM-79 & IESNA LM-80 Testing:

LED luminaires have been tested based on IESNA LM- 79 and LM-80 by a third-party laboratory

L70 Lifetime: > 100K hours at 25° C

SKU GUIDE


Model Section		WPLM-80W-40K-DV2-PC-CL-BZ						
WPLM		80W	40K	DV2		PC	CL	BZ
BODY TYPE PREFIX	MODEL NAME	WATTAGE	CCT (if selectable = CCT)	DRIVER	VOLTAGE	CONTROLS	ELECTRICAL OPTIC/LENS	HOUSING FINISH
WPL	M - Medium	80W	40K=4000K	D - 0-10V Dimming	V2 - 120-277V (Universal Voltage)	PC- Photocell Sensor	CL-Clear Lens	BZ-Dark Bronze Finish

SKU SPECIFICATION

SKU #	Nominal Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage	Operating Temp.	Certifications
WPLM-80W-40K-DV2-PC-CL-BZ	80W	4000K	11331	142	>80	120-277V	-40°C (-40°F) to 45°C (113°F)	UL listed

PRODUCT DIMENSIONS

Weight: 4.8 lbs.

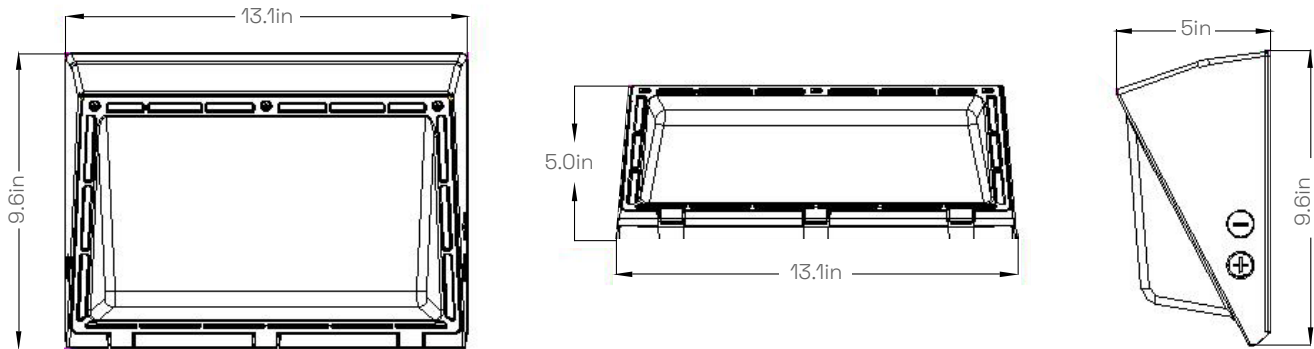


PACKAGING DIMENSIONS

SKU #	Standard Pack	Dimension	Master Pack	Dimension	Weight
WPLM-80W-40K-DV2-PC-CL-BZ	1 Pack	L 10.1 in x W 5.5in x H 13.7in	2 Pack	L 11.8 in x W 10.9in x H 14.7in	6.1 lbs.

PHOTOMETRICS

Representative Model No: WPLL-100W (277V)

Luminous Intensity Distribution Curve

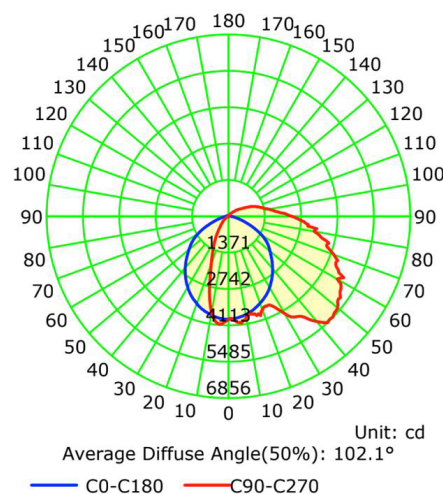

Note: Additional Photometrics Available Online

Medinah Power

Contact us: For support & assistance, please feel free to contact us below.

E-Mail: info@medinahpower.com | Web: www.medinahpower.com | Ph: +1 (844) 870-5337

