



LED CUT-OFF ADJUSTABLE WALL PACK

Project: _____ Location: _____
Date: _____ Part #: _____
Notes: _____



Performance & Features

LED Source

- 3 CCT Selectable (3000/4000K/5000K)
- 4 Lumen output adjustable
- CRI >80
- 0-10V dimmable driver
- 120-277V input
- Adjustable lens to angle light
- Built-in 2.5KV surge protection
- Replaces: Up to 200W MH
- Integral Photocell
- J-box mount

Construction

- Highly durable die-cast aluminum housing
- Long-lasting dark bronze finish
- Wet Location Rated
- 0° up to 45° beam angle
- Operating Temp: -40°C to +40°C
- Operating Temp (EM): 0°C to +40°C

Certifications and Warranty

- ETL Listed
- FCC Class B
- Backed by a 5-year limited warranty

SKU Guide

Example: ACW-8T30W-3CCT-DV2-PC-BZ

Family	Wattage	CCT	Driver & Voltage	Controls	Finish	Options
ACW	8T30W 30T60W 60T120W	3CCT = 3000K 4000K 5000K	D = 0-10V Dimming V2 = 120-277V	PC = Photocell	BZ = Bronze	EL = Emergency Back Up

Specification

Model No.	Power (W)	Lumens (lm*)	CCT (K)	LPW	Finish	EM
ACW-8T30W-3CCT-DV2-PC-BZ	8/15/25/30W	1,136 2,130 3,550 4,250	3000K 4000K 5000K	142	Bronze	Optional
ACW-8T30W-3CCT-DV2-PC-BZ-EL	8/15/25/30W	1,136 2,130 3,550 4,250	3000K 4000K 5000K	142	Bronze	EM Battery Included
ACW-30T60W-3CCT-DV2-PC-BZ	30/40/50/60W	4,250 5,650 7,050 8,450	3000K 4000K 5000K	141	Bronze	Optional
ACW-30T60W-3CCT-DV2-PC-BZ-EL	30/40/50/60W	4,250 5,650 7,050 8,450	3000K 4000K 5000K	141	Bronze	EM Battery Included
ACW-60T120W-3CCT-DV2-PC-BZ	60/80/100/120W	8,450 11,250 14,100 16,900	3000K 4000K 5000K	141	Bronze	Optional

Contact for custom configuration & specifications

* Lumen outputs shown at 4000K. Lumen multiplier for 3000K & 5000K is 0.88.

Accessories



EL Battery Backup

Dimensions

ACW-8T30W-3CCT-DV2-PC-BZ
ACW-30T60W-3CCT-DV2-PC-BZ



ACW-60T120W-3CCT-DV2-PC-BZ





Packaging Dimension

Model No.	Master Carton	Qty
ACW-8T30W-3CCT-DV2-PC-BZ ACW-8T30W-3CCT-DV2-PC-BZ-EL	11.3 x 9.0 x 10.3 in	2
ACW-30T60W-3CCT-DV2-PC-BZ ACW-30T60W-3CCT-DV2-PC-BZ-EL	11.3 x 9.0 x 10.3 in	2
ACW-60T120W-3CCT-DV2-PC-BZ	13.7 x 12.2 x 10.7 in	2

Photometry

ACW-8T30W-3CCT-DV2-PC-BZ Light module rotated to 45°





Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	609.1	16%	16%
0-40	1,142.9	30.1%	30.1%
0-60	2,406.5	63.3%	63.3%
60-90	1,133.2	29.8%	29.8%
70-100	735.0	19.4%	19.3%
90-120	236.4	6.2%	6.2%
0-90	3,539.7	93.1%	93.1%
90-180	261.0	6.9%	6.9%
0-180	3,800.7	100.1%	100%

BUG Rating	B1 - U3 - G3
Forward Light	Lumens Lumens %
Low(0-30):	464.4 12.2%
Medium(30-60):	1,646.3 43.4%
High(60-80):	873.4 23%
Very High(80-90):	225.7 5.9%
Back Light	
Low(0-30):	144.7 3.8%
Medium(30-60):	151.4 4%
High(60-80):	29.9 0.8%
Very High(80-90):	4.0 0.1%
Uplight	
Low(90-100):	134.0 3.5%
High(100-180):	126.9 3.3%
Trapped Light:	0.000 0%

ACW-30T60W-3CCT-DV2-PC-BZ


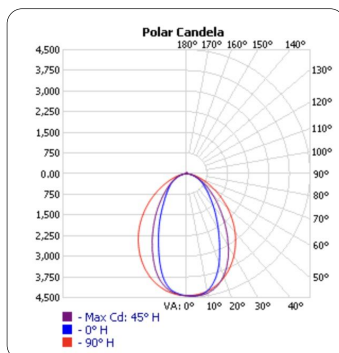


Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	3,025.4	38.8%	38.8%
0-40	4,507.4	57.7%	57.8%
0-60	6,724.5	86.1%	86.2%
60-90	1,000.8	12.8%	12.8%
70-100	386.8	5%	5%
90-120	17.5	0.2%	0.2%
0-90	7,725.3	99%	99%
90-180	79.6	1%	1%
0-180	7,804.8	100%	100%

BUG Rating	B3 - U3 - G1
Forward Light	Lumens Lumens %
Low(0-30):	1,564.4 20%
Medium(30-60):	1,951.0 25%
High(60-80):	478.2 6.1%
Very High(80-90):	34.1 0.4%
Back Light	
Low(0-30):	1,461.3 18.7%
Medium(30-60):	1,749.1 22.4%
High(60-80):	448.9 5.8%
Very High(80-90):	39.5 0.5%
Uplight	
Low(90-100):	3.4 0%
High(100-180):	76.2 1%
Trapped Light:	1.0 0%

ACW-60T120W-3CCT-DV2-PC-BZ Light module rotated to 45°

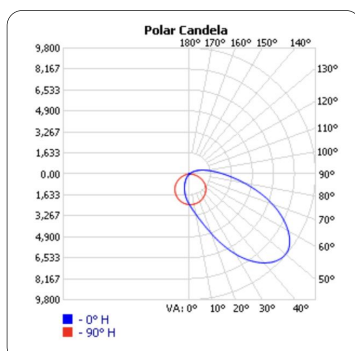

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	2,231.5	13.3%	13.3%
0-40	4,203.3	25.1%	25%
0-60	9,588.4	57.2%	57%
60-90	5,914.0	35.3%	35.2%
70-100	4,010.9	23.9%	23.9%
90-120	1,202.0	7.2%	7.1%
0-90	15,502.5	92.2%	92.2%
90-180	1,314.1	7.8%	7.8%
0-180	16,816.5	100.2%	100%

BUG Rating	B2 - U4 - G5
Forward Light	Lumens Lumens %
Low(0-30):	1,594.7 9.5%
Medium(30-60):	6,755.3 40.3%
High(60-80):	4,507.6 26.9%
Very High(80-90):	1,266.2 7.5%
Back Light	
Low(0-30):	636.6 3.8%
Medium(30-60):	602.8 3.6%
High(60-80):	119.3 0.7%
Very High(80-90):	20.3 0.1%
Uplight	
Low(90-100):	709.5 4.2%
High(100-180):	604.3 3.6%
Trapped Light:	0.000 0%