



E-FFD-B SERIES

Compact LED Flood Light
Square and Round

Replaces up to 320W MH



Huge Savings In A Compact Size

Our savr Compact LED Flood Light delivers up to 9700 lumens, and comes with a 1/2-inch adjustable fitter or yoke mount, depending on the lumen output you need. It's available in 4000K or 5000K, dark bronze or white housing and round or square styles. Without sacrificing quality, we kept affordability in mind to make the costly upgrades the least of your worries when it comes to outdoor lighting. It's cULus Listed and comes with a 5-year warranty.

Features & Benefits

- Sleek, low-profile design
- Wide light distribution
- 1/2 inch adjustable fitter or yoke mount included
- 4kV surge protection
- FCC Part 15, Subpart B, Class A limits for conducted and radiated emissions

Recommended Use

- Building Facades
- Signs/Monument
- Accent Lighting

Input Voltage

- 120V

Certifications




WARNING: Cancer and Reproductive Harm - www.p65warnings.ca.gov




E-FFD-B SERIES


E-FFD01A (WITH 1/2-INCH ADJUSTABLE FITTER MOUNT)

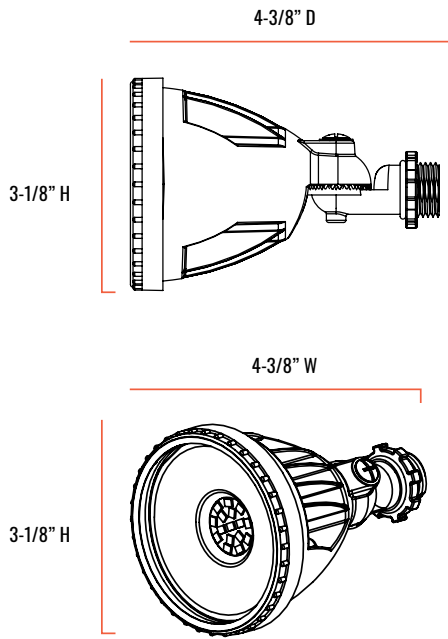


E-FFD03B (WITH 1/2-INCH ADJUSTABLE FITTER MOUNT)

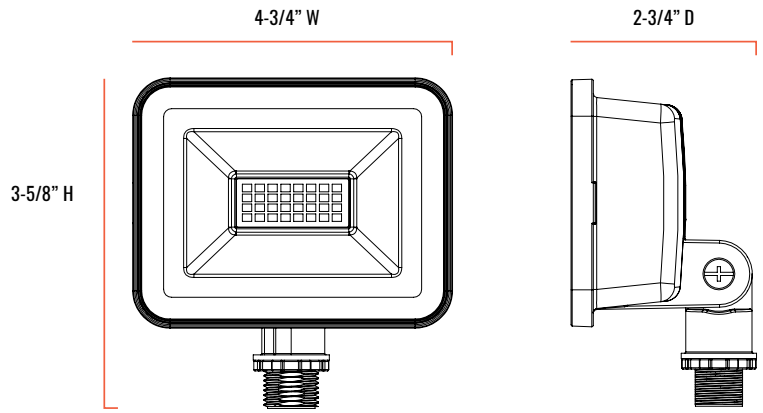

E-FFD05B & E-FFD07B (WITH 1/2-INCH ADJUSTABLE FITTER MOUNT)

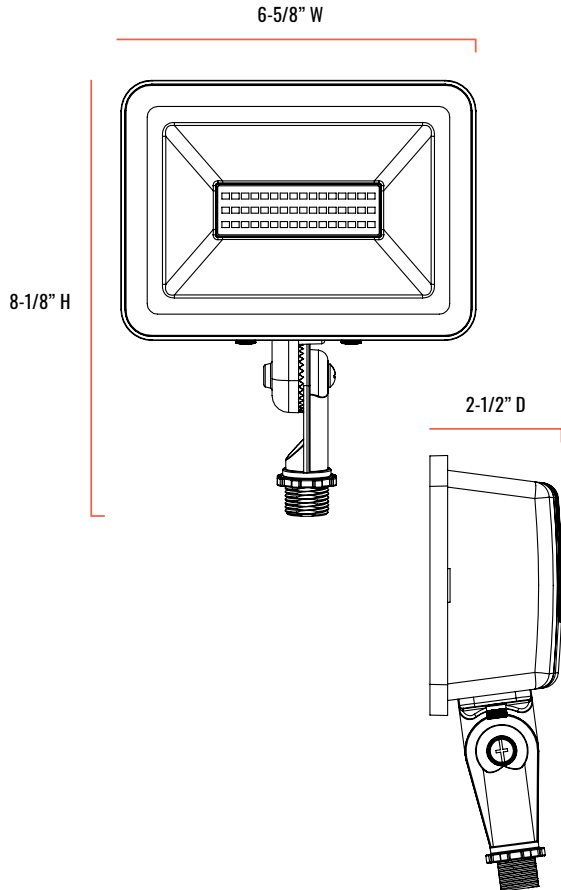

E-FFD10B (WITH 1/2-INCH ADJUSTABLE FITTER MOUNT)

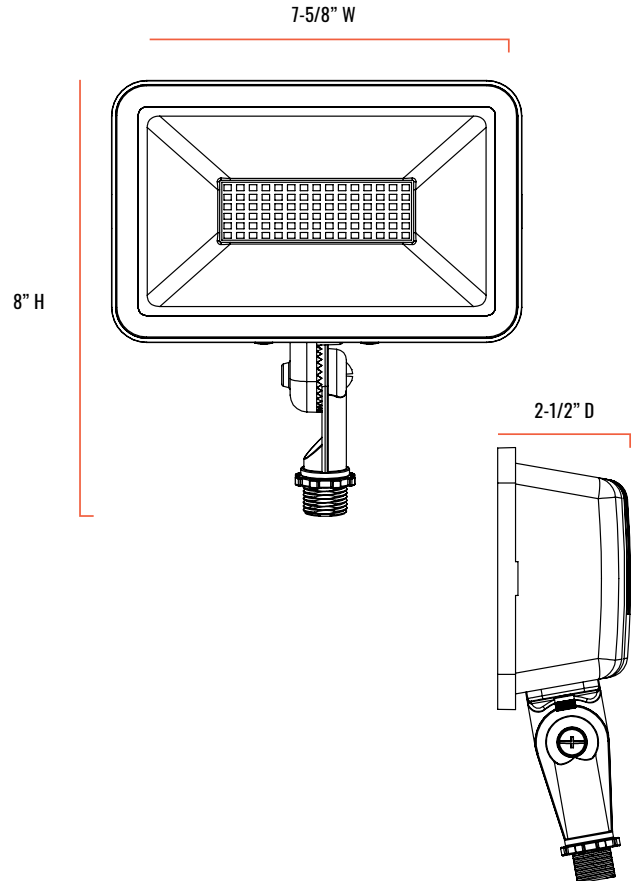

E-FFD-B SERIES

SERIES OVERVIEW

SHAPE	DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT
Round	E-FFD01: 4-3/8" D x 3-1/8" W x 3-1/8" H	.6 lbs.	Up to 15 feet
Square	E-FFD03B: 2-3/4" D x 4-3/4" W x 3-5/8" D	1 lb.	
	E-FFD05B & E-FFD07B: 2-1/2" D x 6-5/8" W x 4-7/8" H	2.11 lbs.	
	E-FFD10B: 2-1/2" D x 7-5/8" W x 4-7/8" H	2.24 lbs.	

FIXTURE SPECIFICATIONS

HOUSING	Dark bronze or white powder coated die-cast aluminum housing
LENS ASSEMBLY	Tempered glass
MOUNTING	1/2 inch adjustable fitter or yoke mount (included)


WARRANTY & CERTIFICATIONS

WARRANTY	5-Year Limited
UL LISTED	Wet locations
DLC	—

ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE	LIFESPAN L70 AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°F to 104°F (-40°C to 40°C)	50,000 hours	n/a	n/a	—

INPUT VOLTAGE Current Draw (Amps)	120V
E-FFD01A	0.191A
E-FFD03B	0.35A
E-FFD05B	0.44A
E-FFD07B	0.70A
E-FFD10B	1.08A

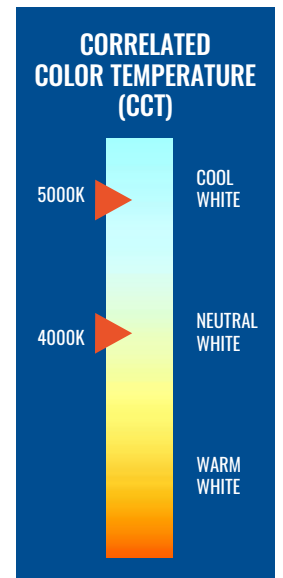

E-FFD-B SERIES

ORDERING INFORMATION

Example SKU: E-FFD05B-SWF50Z

E-FFD				SCCT	UL	BZ	
PRODUCT	LUMEN PACKAGE	SERIES	HOUSING SHAPE	DISTRIBUTION	MOUNT	CCT	HOUSING COLOR
E-FFD	10 9700 Lumens (71W) Replaces: 320W PSMH	B	S Square	W Wide	F 1/2-inch Adjustable Fitter Y Yoke Mount (Blank) 1/2" Fitter (01A Series Only)	40 4000K 50 5000K	W White (10B, 05B, 01A Series Only) Z Dark Bronze
	07 6900 Lumens (49W) Replaces: 150W MH						
	05 4700 Lumens (32W) Replaces: 150W MH						
	03 2675 Lumens (24W) Replaces: 70W MH						
	01 1200 Lumens (12W) Replaces: 50W MH	A	R Round				

ACCESSORIES (SOLD SEPARATELY)



Dark bronze 4-inch Round Weatherproof J-Box Cover with 1/2 inch NPT Threaded Knockout
SKU: E-ACC-MP4-DB
USE: For use with the 1/2-inch adjustable fitter mounts.
DIMENSIONS: 4-1/2" D x 7/8" H
CONSTRUCTION: Dark bronze, powder coated die-cast aluminum housing



White 4-inch Round Weatherproof J-Box Cover with 1/2 inch NPT Threaded Knockout
SKU: E-ACC-MP4-WH
USE: For use with the 1/2-inch adjustable fitter mounts.
DIMENSIONS: 4-1/2" D x 7/8" H
CONSTRUCTION: White, powder coated die-cast aluminum housing

© 2026 Cree Lighting USA LLC. All rights reserved. For informational purposes only. Content is subject to change. The savr logo is a registered trademark of e-conolight, LLC. The cULus logo is a registered trademark of UL LLC.

e-conolight.com | Customer Service: 888-243-9445 | Fax: 262-504-5409
 1501 96th Street, Sturtevant, WI 53177

February 12, 2026 For informational purposes only. Content is subject to change.

